



MAKING A "WAY" OUT OF "NO WAY"

104th St LLC
unaddressed-north & east of 4131 104th St NE after BLA
PN PreA21-025
1st: October 2022

**Stormwater Site Plan
Report
for
104th Rezone Dell's
Nursery**


Prepared by:

Mier Zhou, E.I.T.

360-652-9727

Email: Mier@landtechway.com

Email: Tyler@landtechway.com



10/10/2022

Reviewed by:

Tyler Foster, P.E.

360-652-9727

Contents

Contents	i
Section 1 – Report Summary	1
1.1 Project Description	1
1.2 Project Data Summary.....	2
Section 2 - Minimum Requirements.....	1-1
2.1 Assessment of Minimum Requirements and Thresholds	1-1
2.2 MR #1: Preparation of Stormwater Site Plans	1-2
2.3 MR #2: Stormwater Pollution Prevention Plans (SWPPPs).....	1-5
2.4 MR #3: Source Control of Pollution.....	1-6
2.5 MR #4: Preservation of Natural Drainage Systems and Outfalls	1-7
2.6 MR #5: On-Site Stormwater Management	1-8
2.7 MR #6: Runoff Treatment	1-9
2.8 MR #7: Flow Control.....	1-10
2.9 MR #8: Wetlands Protection	1-11
2.10 MR # 9: Operation and Maintenance.....	1-12
Section 3 - Maps & Figures	3-1
Section 4 - Support Data	4-1
4.1 Soils Data	4-1
Section 5 Works Cited.....	5-4
5.1 Topographic Data	5-4
Section 6 - Continuous Simulation Modeling	6-1
6.1 Continuous Simulation Background	6-1
6.2 Modeling Methodology.....	6-1
Section 7 - Software Output	7-1

Figures

Figure 1 - Vicinity Map	3-1
Figure 2 - Existing Conditions (not to scale)	3-2
Figure 3 – Downstream Flow Path	3-3
Figure 4 - Site Plan	3-4
Figure 5 – Soil Map (Not to Scale).....	3-5
Figure 6 - Basin Map	3-6

Tables

Table 1 - Project Parcel Summary	2
Table 2 - Project Area Analysis & Activities Summary	2
Table 3 – Bioretention Cells Specification	1-10

Acronyms

The following acronyms and abbreviations may or may not be called out within the body of this report.

○ ASTM	- American Society for Testing and Materials
○ BMPs	- Best Management Practices
○ CB	- Catch Basin
○ CAO	- Critical Areas Ordinance
○ CESCL	- Certified Erosion and Sediment Control Lead
○ DOE	- Department of Ecology
○ EDDS	- Engineering Design & Development Standards
○ FEMA	- Federal Emergency Management Agency
○ HSPF	- Hydrological Simulation Program—Fortran
○ LiDAR	- Light Detecting And Ranging
○ LDA	- Land disturbing activity
○ LID	- Low Impact Development
○ LID Manual	- DOE 2005 LID Technical Guidance Manual for Puget Sound
○ MRs	- Minimum Requirements (for Stormwater Management)
○ MS4	- Municipal Separate Storm Sewer System
○ MSL	- Mean Sea Level
○ NAVD88	- North American Vertical Datum of 1888
○ NGVD29	- National Geodetic Vertical Datum of 1929
○ NPDES	- National Pollutant Discharge Elimination System
○ NRCS	- Natural Resources Conservation Service
○ NPGIS	- Non-Pollutant Generating Impervious Surface
○ O&M	- Operations and Maintenance
○ PGIS	- Pollutant Generating Impervious Surface
○ PGPS	- Pollutant Generating Pervious Surface
○ PLSS	- Public Land Survey System
○ POC	- Point of Compliance
○ RCW	- Revised Code of Washington
○ ROW	- Right-of-Way
○ SCDM-2010	- Snohomish County 2010 Drainage Manual
○ SMMWW	- DOE 2005 Stormwater Management Manual for Western Washington
○ SWPPP	- Stormwater Pollution Prevention Plan
○ TDA	- Threshold Discharge Area
○ TESC	- Temporary Erosion and Sediment Controls
○ USDA	- United States Department of Agriculture
○ US EPA	- United States Environmental Protection Agency
○ WSDOT	- Washington State Department of Transportation
○ WWHM	- Western Washington Hydrology Model

Section 1 – Report Summary

1.1 Project Description

104th St LLC is proposing the development of 3.19-*acres* of land in northwest Marysville, WA near 104th St NE. The proposed development will be warehouse/office facilities.

The parcel is currently undeveloped and heavily vegetated with grasses, bushes, shrubs and variable diameter trees. Quilceda Creek and significant Critical Area Buffers border the property on the west side.

The development of the parcel will result in two office/warehouse commercial structures with drive aisle, parking areas and stormwater management systems.

The site will be accessed from 104th St NE. No right of way dedication is required for 104th St NE.

The 2014 DOE Stormwater Management Manual for Western Washington will be used for stormwater management. Stormwater management will rely largely on infiltration of treated stormwater.

Highly permeably sandy soils area found throughout the site. These sandy soils are representative of Vashon Recessional Outwash deposits.

Per NRCS mappings, type “B/D” Norma Loam soils and type “A” Ragnar Fine Sandy Loam soils are found throughout the site. Soils investigation performed by Cobalt Geosciences, LLC corroborates the NRCS findings. Groundwater is assumed to be located around 30 *feet* BPG.

The entire developable project area is in a single natural discharge area with a single discharge location to the tributary of Quilceda Creek. Stormwater BMPs will be employed to mitigate polluted and unpolluted surface water flows.

1.2 Project Data Summary

Existing and proposed project areas are presented for determination of stormwater management requirements based on prescribed thresholds as outlined in the Marysville Municipal Code (MMC 22C) and the 2014 SMMWW Vol-1, Ch-2, Section 2.4 are summarized in the following tables.

Table 1 - Project Parcel Summary

Project Data:	
Applicant	104th St LLC
Site Owner	104th St LLC
Project Name	104th Rezone Dell's Nursery
Project T.S.R. Location	TwN 30 N, Rng 5 E, Sec 16, Qtr-NW
Project Address	unaddressed-north & east of 4131 104th St NE after BLA
Parcel ID(s)	300516-002-001-00, 300516-002-003-00
Watershed	Snohomish
Basin	Quilceda Creek
Sub-Basin	Hayho Creek
WRIA Number	7
Analysis Standard	2014 DOE SMMWW

Table 2 - Project Area Analysis & Activities Summary

Existing Conditions:		
Total Site Area	139,003	sf (3.19 ac)
Existing Impervious Area	0	sf (0.00 ac) 0%
Proposed Activity:		
Proposed Activity	Commercial Site (Office/Warehouse)	
Total Proposed Disturbance Area	76,310	sf (1.75 ac)
Proposed Grading Area	76,310	sf (1.75 ac)
Proposed New NPGIS (roof)	31,492	sf (0.72 ac)
Proposed New PGIS (Road and Driveway/Parking)	32,070	sf (0.74 ac)
Proposed Replaced Impervious Area	0	sf (0.00 ac)
Native Vegetation convert to Lawn	0	sf (0.00 ac)
Native Vegetation convert to Pasture	0	sf (0.00 ac)
Total New Impervious Area	63,562	sf (1.46 ac)
Total Site Impervious Area (new+exist)	63,562	sf (1.46 ac)
Grading is ≤ 2 feet from P/L	No	
Any excavation 4+' at <1:1 slope to P/L	No	
Fill Slopes 4+' and >33% slope	No	

Section 2 - Minimum Requirements

2.1 Assessment of Minimum Requirements and Thresholds

Minimum requirements and thresholds are established by City of Marysville Municipal Code 14.15.050 – Minimum Requirements. Minimum Requirements for new development and Redevelopment are based on a development's disturbance area. Existing and proposed project areas for determination of stormwater management requirements are presented in Table 2.

The existing impervious area is less than 35% so this project qualifies as 'new development'. The proposed condition of the fully developed site will have impervious area in excess of 5,000 sf. This requires construction activities and stormwater management to comply with Minimum Requirements 1 through 9. A full construction SWPPP is also required.

Minimum Requirements per the SCMD:

- MR-1: Prepare Stormwater Site Plan. MMC 14.15.050 (1)
- MR-2: Stormwater Pollution Prevention Plan (SWPPP). MMC 14.15.050 (2)
- MR-3: Water pollution source control for new development. MMC 14.15.050 (3)
- MR-4: Preservation of natural drainage systems and outfalls. MMC 14.15.050 (4)
- MR-5: On-site stormwater management. MMC 14.15.050 (5)
- MR-6: Runoff treatment. MMC 14.15.050 (6)
- MR-7: Flow control requirements. MMC 14.15.050 (7)
- MR-8: Detention or treatment in wetlands and wetland buffers. MMC 14.15.050 (8)
- MR-9: Inspection, operation and maintenance requirements. MMC 14.15.050 (9)

Each Minimum Requirements is described in the following sections. There are no additional requirements to be met.

2.2 MR #1: Preparation of Stormwater Site Plans

This document is the Stormwater Site Plan Report that addresses the requirements of MR-1. This section presents the portion of the Stormwater Site Plan that includes recommendations, calculations, and procedures required to adhere to Minimum Requirement #1. The evaluation of the existing site conditions follows.

2.2.1 Site Location

The site is located in the NW quarter of Section 16 of Township 30 North, Range 5 East. The street address is unaddressed-north & east of 4131 104th St NE after BLA and the parcel is located on the north side of 136th St NE. See Figure 1 for a vicinity map.

2.2.2 Site Description, Existing Conditions

The project site is 3.19-*acres* parcel. The parcel is owned by 104th St LLC. The Snohomish County parcel number is 300516-002-001-00, 300516-002-003-00. They are zoned R4.5 and a rezone proposal to General Commercial has been submitted.

The parcel is undeveloped forest. The existing drainage system(s) are undetermined but largely surface runoff flows west to an offsite Type F pond type feature and some infiltration.

All maps and figures are presented in the Support Data section of this document.

A vicinity map that shows the site location is shown as Figure 1.

A site map that shows the property lines is shown in Figure 2.

A topographic map that shows the site boundaries, study area boundaries, and the downstream flow-paths is also presented in Figure 3.

2.2.3 Existing Basin Analysis

The project is defined by the development within the subject parcel. Existing project flow paths are shown in Figure 2.

The study area is located in the Hayho Creek sub-basin of the Quilceda Creek Basin in the Snohomish watershed (WRIA-7), which drains to the Puget Sound.

All existing flow assessment and site related basin delineations were established by tracing analysis of a LIDAR surface model.

2.2.4 Other Information on the Study Area

The site is not in or adjacent to a USEPA Sole Source Aquifer.

The site is not in a well-head protection area.

The site is not in a floodway or floodplain.

2.2.5 Critical Areas

A site reconnaissance performed by Sewell Wetland Consulting, Inc. in 2020 indicated that critical areas are found along western boundary of the site. A riverine type wetland is along the western boundary of the site. The wetland is Category II and carries a 100' buffer. The tributary of Quilceda Creek that passes through the site. The tributary is located off-site within the wetland.

2.2.6 Topography

The site and surrounding topography was analyzed using survey topographic points provided by the Puget Sound Lidar Consortium. A 3D surface model was generated.

The site has mostly flat slopes with slightly sloping downward to the west. There are steep slopes extending downward to the west near property lines.

Slopes average in the range of 0 to 50 percent for the majority of the developable area. The site has an average slope of 17.36%.

2.2.7 Soils

Per NRCS mappings, type "B/D" Norma loam are found through the west of the site. Type "A" Ragnar Fine Sandy Loam are located in the east portion of the site. Norma loam soils have a 0-10 *inch* first layer of fine ashy loam with the remaining profile being sandy loam. Ragnar fine sandy loam soils have 0 to 24 inch first layer of ashy sandy loam with the remaining profile being loamy sand.

Soils investigation performed by Cobalt Geosciences, LLC corroborates the NRCS findings. Groundwater is assumed to be located around 30 *feet* BPG. Grain Size Analysis infiltration testing by Cobalt yielded a 3 to 5 inch/hour infiltration rate. 4 inch/hour long-term infiltration rate will be used.

Detailed physical and chemical properties of these soils are presented in Section 4.1. The NRCS mapping can be seen in Figure 5.

2.2.8 Field Inspection

The site has not been visited recently. All site evaluation conducted per remote sensing.

2.2.9 Upstream Analysis

A relative high point at 66 *feet* MSL is located offsite directly west of the site at the centerline of BNSF R/R. The upstream area to the site is directly to the east of the site from Burlington Northern Santa FE Railroad. The upstream area is around 0.8 acres in size.

2.2.10 Downstream Analysis

The downstream area was established by tracing analysis of a LIDAR surface model and evaluation of various GIS data, aerial imagery, and City of Marysville Drainage Inventory. The development area flows across the property boundary line to the west and to a tributary of Quilceda Creek. Stormwater along the tributary of Quilceda Creek crosses 103rd St NE through an existing culvert. After traveling around 800 ft, the tributary of Quilceda Creek becomes West Fork Quilceda Creek. Quilceda Creek drains to the Puget Sound.

Figure 3 shows a portion of the downstream flow path.

2.3 MR #2: Stormwater Pollution Prevention Plans (SWPPPs)

MMC 14.15.050 (2) specifies the requirements for development and redevelopment projects are responsible for preventing erosion and discharge of sediment and other pollutants into receiving waters. Volume I, Chapter 2.5.2 of the 2014 SMMWW specifies that all new development and redevelopment implement a Stormwater Pollution Prevention Plans (SWPPP), which is a list of 13 elements that present measures and methods for all permanent and temporary erosion and sediment control (TESC), pollution prevention, inspection/monitoring activities, and recordkeeping required during the proposed construction project.

Based on the MR#2 thresholds, this project generates more than 2,000 *square feet* of impervious area, so a full SWPPP is required. Required elements for the SWPPP:

- SWPPP element 1: Preserve vegetation/mark clearing limits
- SWPPP element 2: Establish construction access
- SWPPP element 3: Control flow rates
- SWPPP element 4: Install sediment controls
- SWPPP element 5: Stabilize soils
- SWPPP Element 6: Protect slopes
- SWPPP element 7: Protect permanent drain inlets
- SWPPP element 8: Stabilize channels and outlets
- SWPPP element 9: Control pollutants
- SWWP element 10: Control dewatering
- SWPPP element 11: Maintain best management practices
- SWPPP element 12: Manage the project
- SWPPP element 13: Protect On-Site Stormwater Management BMPs for Runoff from Roofs and Other Hard Surfaces

The SWPPP is assembled as a separate document for portability and reproduction purposes. The document is titled “**Stormwater Pollution Prevention Plan for Bayview Electric**”, dated 10 October 2022. This document will be provided with Construction Plan Submittal.

2.4 MR #3: Source Control of Pollution

MMC 14.15.050 (3) specifies the requirements for water pollution source control for new development or redevelopment activities in accordance with Volume IV of the SMMWW. These activities are primarily commercial industrial developments that represent significant pollutant generation potential and the associated source control BMPs are designed to suit those activities.

Per Chapter 2.5.3, MR#3 does not apply to this industrial development. Hence such source controls are not specified for this project.

2.5 MR #4: Preservation of Natural Drainage Systems and Outfalls

MMC 14.15.050 (4) specifies the requirements for preservation of natural drainage systems or outfalls for all new development and redevelopment activities under Minimum Requirement 4 in the 2014 SMMWW.

Natural drainage patterns as they once existed shall be retained. Existing conditions experience a sheet drainage pattern to the site's west property boundary. Stormwater generated onsite reaches the property boundary through surface runoff during only extreme storm events (exceeding 100-year storm).

2.6 MR #5: On-Site Stormwater Management

MMC 14.15.050 (5) specifies requirements for on-site stormwater BMPs. This requirement mandates that on-site stormwater runoff be infiltrated, dispersed, and/or retained to the maximum extent feasible without causing flooding or erosion impacts. Projects triggering Minimum Requirements 1 through 5 must use On-site stormwater management BMPs from List #1 for all surfaces or demonstrate compliance with the LID Performance Standard. Projects triggering Minimum Requirements 1 through 9 must meet the requirements of Table 2.5.1 in Vol. 1 of the 2014 SMMWW. Table 2.5.1 specifies the requirements for new or redevelopment depending on UGA and parcel size to meet the requirements of the LID Performance Standard and/or List #2. List #1 and List #2 specify stormwater BMPs in order of preference. The first BMP determined feasible is required.

This project trigger MR's 1-9. This project is within the City's UGA. This project is required to adhere to the LID Performance Standard or List #2 per Table 2.5.1.

List #1 and #2 contain appropriate BMPs to mitigate a particular developed surface. The surfaces included in the list are Lawn and Landscaped Areas, Roofs, and other hard surfaces (road/driveway/parking).

Lawn/Landscape is required to utilize BMP T5.13, Post-Construction Soil Quality and Depth.

Roofs are required to employ BMP T5.30 Full Dispersion or Downspout Infiltration, Rain Gardens or Bioretention, BMP T5.10A Downspout Dispersion Systems, or perforated stub-out connections. The first feasible BMP in this list must be used.

Other Hard surfaces (Roads, Driveways, Parking Lots, Etc.) must utilize BMP T5.30 Full Dispersion, BMP T5.15 Permeable Pavement, Bioretention, Sheet Flow Dispersion, or Concentrated Flow Dispersion. The first feasible BMP in this list must be used.

Lawn/landscape will utilize BMP T5.13, Post Construction Soil Quality and Depth.

Roofs will not be able to provide BMP T5.30 Full Dispersion. Full Dispersion requires 100 foot flow paths within native areas. The project will not be able to maintain 65% open space.

Roofs will be able to provide BMP T5.10A Full Infiltration. Infiltration requires suitable soils with depth. Onsite soils of medium sand are expected. Rooftops will be conveyed to onsite infiltration trenches sized in accordance with BMP T5.10A with 30-lf of trench per 1,000sf of rooftop. 945 lf of trench will be provided for the full infiltration of rooftop generated stormwater. Land segments fully infiltrated by BMPs will be discounted from the stormwater model.

Road and Driveway/Parking will be routed to Bioretention areas, BMP T7.30. (See BMP T7.30 and Section 3.4 for specific design criteria) The Bioretention cells will treat stormwater through filtering, phytoremediation, and microbial action from within the compost.

A combination of the bioretention cell and rockbed will treat 100% of incoming stormwater generated from the PGIS (Per MR#6). See Minimum Requirement #6.

Permeable pavement may not be used as due to the site use is a commercial/industrial activity defined by 40 CFR 122.26(b)(14).

A site plan showing the stormwater management and development can be seen in Figure 4.

2.7 MR #6: Runoff Treatment

Minimum Requirement #6 in MMC 14.15.050 (6) specifies the requirements for providing runoff treatment. The threshold for requiring a treatment BMP is 5,000 *square feet* of PGIS (Pollution Generating Impervious Surface) or a total of more than $\frac{3}{4}$ of an acre of PGPS (Pollution Generating Pervious Surface).

This project is expected to generate 32,070 *square feet* (0.74 *acres*) of PGIS based on road, driveway, sidewalk, and parking areas, therefore treatment facility BMPs are required for this project.

Runoff treatment facility selection is outlined in Vol. I, Ch. 4.2, Step V of the 2014 SMMWW. Step V outlines the treatment facility selection flow chart based on the intended use of a project. Treatment selection is based on if the site is a high-use site, if the downstream receiving waters are phosphorous sensitive, and/or if the site is required to provide enhanced treatment. The definitions of high-use, phosphorous control, and enhanced treatment can be found in Step V in Section 4.2 of the 2014 SMMWW.

The project is not a high use site and infiltration is practicable for the site.

The project is not required to treat for phosphorous.

Enhanced treatment is not required for the project.

Basic treatment is provided through the use of a bioretention facility per Vol. III Section 3.3.12 of the 2014 SMMWW. The bioretention specified will provide enhanced treatment. The bio-cell treats stormwater through the infiltration of stormwater through soils and their ability to absorb pollutants. See Vol III. Section 3.3.12 of the 2014 SMMWW for specific soil design criteria.

The bioretention cell mitigates polluted stormwater through physical, chemical and biological treatment processes. The treatment process will break down heavy metals that are not easily separated by physical means. Stormwater percolates through compost amended soils and plantings to obtain treatment. Stormwater flows through this part of the cell at a rate of 4.0 *inches/hour*. Infiltration is allowed to occur below the bio-cells. The total percolated runoff through the bio-cell's amended soils is well over the 91% total runoff volume treatment requirement. See Section 7.

2.8 MR #7: Flow Control

Minimum Requirement #7 in MMC 14.15.050 (7) specifies the requirements for runoff flow control. The threshold for requiring Minimum Requirement #7 is 5,000 *square feet* of impervious surface. Flow control shall be provided if the project creates more than 10,000 *square feet* of effective impervious area in a threshold discharge area, converts $\frac{3}{4}$ of an acre or more of native vegetation to lawn, 2.5 *acres* or more native vegetation is converted to pasture, or a combination of impervious and converted pervious surfaces cause a 0.1 *cfs* increase in the 100-year flow frequency from a continuous simulation runoff model.

The project exceeds this requirement and is required to provide flow control. Flow Control is provided by infiltration. A small portion of a drive aisle bypasses facilities for infiltration. A small portion of pasture also is treated as bypass. The bypassed area flows to the existing pathway as has existed in years past. Separation limits prohibit this stormwater from being infiltrated. See Figure 6 for delineation of areas unable to drain to bioretention cell for full infiltration.

The project uses bioretention cells to detain and treat all incoming stormwater flow from PGIS. The bioretention cell marginally detains stormwater but provides 100% treatment of stormwater generated by PGIS. The bio-cells are comprised of 1.5 *feet* of amended soils, 0.5 *feet* of clean chip filter and 2.0 *feet* of rock storage. The bio-cell utilizes a 0.75 *foot* ponded area with 0.5 *feet* of freeboard to allow stormwater to infiltrate through the amended soils.

Table 3 – Bioretention Cells Specification

	min. Req'd Size	Side Slope	Free Board	Riser Height	Compost Amended Soils X	Sand Y	Gravel Z
Cell A	560.0 sf	0.5	0.5 ft	1.0 ft	1.5 ft	0.5 ft	2.0 ft
Cell B	500.0 sf	0.5	0.5 ft	1.0 ft	1.5 ft	0.5 ft	2.0 ft
Cell C	500.0 sf	0.5	0.5 ft	1.0 ft	1.5 ft	0.5 ft	2.0 ft

Roofs will be able to provide BMP T5.10A Full Infiltration. Infiltration requires suitable soils with depth. Onsite soils of medium sand are expected. A total of 945 lineal feet of Infiltration trench will be provided for full infiltration of the stormwater generated by the rooftops.

See Section 7 for bio-cell and rooftop infiltration modeling parameters. See Figure 6 for Basin Mapping.

2.9 MR #8: Wetlands Protection

MMC 14.15.050 (8) specifies requirements for discharge of stormwater in wetlands and wetland buffers as well as discharge of stormwater to a stream.

Since there is no detention or treatment in the critical areas, MR-8 does not apply to this project.

2.10 MR # 9: Operation and Maintenance

Minimum Requirement #9 specified MMC 14.15.050 (9) contains requirements for inspection, operation and maintenance of stormwater facilities and BMPs. Specific maintenance standards and requirements are outlined in Volume V of the 2014 SMMWW. The 2014 SMMWW requires the regular maintenance and inspection of drainage facilities.

For portability and reproduction purposes, the Operations and Maintenance Manual is presented in a separate stand-alone document titled “**Operations and Maintenance Manual for 104th Rezone Dell's Nursery**”, dated **10 October 2022**. This document will be provided with the construction plan submittal.

Section 3 - Maps & Figures

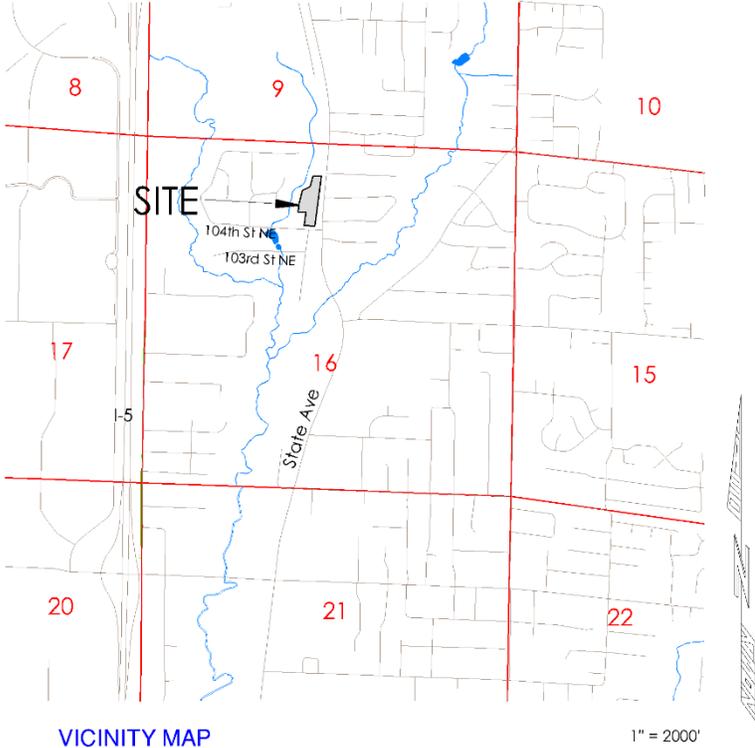


Figure 1 - Vicinity Map



Figure 2 - Existing Conditions (not to scale)



Figure 3 – Downstream Flow Path



Figure 4 - Site Plan



Figure 5 – Soil Map (Not to Scale)



Figure 6 - Basin Map

Section 4 - Support Data

4.1 Soils Data

39—Norma loam

Map Unit Setting

National map unit symbol: 2hyx

Elevation: 0 to 1,000 feet

Mean annual precipitation: 35 to 60 inches

Mean annual air temperature: 48 to 52 degrees F

Frost-free period: 150 to 200 days

Farmland classification: Prime farmland if drained

Map Unit Composition

*Norma, undrained, and similar soils:*85 percent

*Minor components:*15 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Norma, Undrained Setting

*Landform:*Drainageways, depressions

*Parent material:*Alluvium

Typical profile

H1 - 0 to 10 inches: ashy loam

H2 - 10 to 28 inches: sandy loam

H3 - 28 to 60 inches: sandy loam

Properties and qualities

*Slope:*0 to 3 percent

*Depth to restrictive feature:*More than 80 inches

*Drainage class:*Poorly drained

*Capacity of the most limiting layer to transmit water (Ksat):*Moderately high to high (0.57 to 1.98 in/hr)

*Depth to water table:*About 0 inches

*Frequency of flooding:*None

*Frequency of ponding:*Frequent

Available water supply, 0 to 60 inches: Moderate (about 9.0 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 5w

Hydrologic Soil Group: B/D

Ecological site: F002XA007WA - Puget Lowlands Wet Forest

Forage suitability group: Wet Soils (G002XN102WA)

Other vegetative classification: Wet Soils (G002XN102WA)

Hydric soil rating: Yes

Minor Components

Terric medisaprists, undrained

*Percent of map unit:*5 percent

*Landform:*Depressions

*Other vegetative classification:*Wet Soils (G002XN102WA)

Hydric soil rating: Yes

Bellingham, undrained

*Percent of map unit:*5 percent

*Landform:*Depressions

*Other vegetative classification:*Wet Soils (G002XN102WA)

Hydric soil rating: Yes

Norma, drained

*Percent of map unit:*5 percent

*Landform:*Depressions

*Other vegetative classification:*Seasonally Wet Soils (G002XN202WA)

Hydric soil rating: Yes

57—Ragnar fine sandy loam, 0 to 8 percent slopes**Map Unit Setting**

National map unit symbol: 2hzk

Elevation: 300 to 1,000 feet

Mean annual precipitation: 35 to 65 inches

Mean annual air temperature: 50 to 54 degrees F

Frost-free period: 150 to 210 days

Farmland classification: All areas are prime farmland

Map Unit Composition

*Ragnar and similar soils:*100 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Ragnar**Setting**

*Landform:*Outwash plains

*Parent material:*Glacial outwash

Typical profile

H1 - 0 to 2 inches: ashy fine sandy loam

H2 - 2 to 24 inches: ashy sandy loam

H3 - 24 to 60 inches: loamy sand

Properties and qualities

*Slope:*0 to 8 percent

*Depth to restrictive feature:*20 to 40 inches to strongly contrasting textural stratification

*Drainage class:*Well drained

*Capacity of the most limiting layer to transmit water (Ksat):*High (1.98 to 5.95 in/hr)

*Depth to water table:*More than 80 inches

*Frequency of flooding:*None

*Frequency of ponding:*None

Available water supply, 0 to 60 inches: Low (about 3.4 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 2e
Hydrologic Soil Group: A
Ecological site: F002XA004WA - Puget Lowlands Forest
Forage suitability group: Droughty Soils (G002XN402WA)
Other vegetative classification: Droughty Soils (G002XN402WA)
Hydric soil rating: No

Section 5 Works Cited

- Cobalt Geosciences, LLC. (2021). *Limited Geotechnical Evaluation* . Kenmore.
- Puget Sound Action Team. (2005, January). Low Impact Development Technical Guidance Manual for Puget Sound. *Publication No. PSAT 05-03*. Washington: Washington State University - Pierce County Extension.
- Puget Sound LIDAR Consortium. (2003, April). LIDAR Bare Earth DEM File. q47121h24be.e00. Snohomish County, Washington. Retrieved May 2013, from <http://pugetsoundlidar.ess.washington.edu/index.htm>
- Sewall Wetland Consulting, Inc. (2020). *BLA Critical Areas Report - Parcels # 30051600200100, 200 & 300 SWC Job #20-149*. Fall City .
- Snohomish County Planning and Development Services. (2007, October 1). Aquifer Recharge/Wellhead Protection. Everett, WA.
- Snohomish County Surface Water Management Division. (2002, December). Snohomish UGA Drainage Needs Report. Everett, Washington.

5.1 Topographic Data

- The various on and off site topography, utilities, and drainage elements were professionally surveyed by Pacific Coast Surveying in 2015.
- Snohomish County 2003 LiDAR survey was used to augment the existing site topography and the downstream and surrounding areas.

The modeled coordinate system:

Lateral - Washington State Plan Plane - North, FIPS 4601;

Vertical – NAVD 88

Section 6 - Continuous Simulation Modeling

6.1 Continuous Simulation Background

HSPF based continuous simulation modeling was used to evaluate the hydrologic performances of the pre-developed and developed sub-basins in order to accurately assess flow rates.

The currently adopted continuous simulation models use the HSPF (Hydraulic Simulation Program in FORTRAN) software engine. The HSPF model uses a robust and detail accounting of the 'water budget', including evaporation, evapotranspiration, interception, interflow, and groundwater. The modeling accounts for and assesses land segment areas that include vegetation or impervious cover, soil types, and slopes. The modeling also uses utilized over 50 years of continuous rainfall data (precipitation) and evaporation data for the area. The HSPF continuous modeling is considered the best available science for hydrologic analysis.

6.2 Modeling Methodology

HSPF modeling was managed via the Western Washington Hydrology Model (WWHM) interface program. The current professional version of WWHM by Clearcreek Solutions, Inc., WWHM-2012 was used. The current data precipitation and evaporation set provided by DOE with the WWHM-2012 software interface was used that includes quantized data in 15-minute time steps from October 1948 to October 2009.

The WWHM program comes packaged with generic, well considered HSPF modeling parameters. These settings allow for the modeling of the majority of the topological conditions found in the Puget Sound area. Where conditions fall reasonably outside the range of the default HSPF parameters, adjustments should be made to more accurately reflect those conditions. These are generally limited to the pervious land segments (IMPLNDS) and are mostly limited to slopes (SLSUR), infiltration rates (INFILT), and length of flow path (LSUR). For this project, HSPF parameters were not adjusted to reflect site conditions.

6.2.1 Existing Conditions

The surface vegetative cover is assumed fully forested with an average slope of 1% in the area of development, based on the LIDAR based TIN analysis. The LIDAR model represents the pre-graded conditions and is in accordance with the predeveloped requirements to be represented as native vegetation and soils that existed at a site prior to the influence of Euro-American settlement.

The NRCS soil mapping of Norma Loam within the modeled area is Type B/D hydrologic soils by NRCS and DOE.

6.2.2 Developed Conditions

Default mapping for flat road was used for the road, driveway, and parking areas. The intent of the modeling of this site was to determine the infiltration of the bio-retention cell. Flow control modeling took place for the bypass area that is unable to be introduced to street system or infiltrate due to separation from groundwater.

The bio-cell is to be placed in fill that is 3 to 4 ft depths and has infiltration properties consistent with the native soils. In some instances, the bio-cells are placed above present grade and will require soils with similar hydraulic properties to the native soils.

It should be noted that when ponds, bio-swales, or other open detention facilities are used, the corresponding WWHM analysis module includes the ponded area. Consequently, this area is not included in the basin land segment mappings, so the total area is often different between the developed and pre-developed conditions.

The current DOE specification for amended soils in 2014 is labeled as 'SMMWW' in the Bio-Swale and other WWHM modules that employ amended soils. The parameters for modeling the SMMWW are preset and based on current state-of-the-art modeling using a combination of the Darcy's and Van Genuchten's equations to account for the variability of permeability and water content as the soils transition from dry or partly damp to saturated conditions as the bio-cell cycles through the process of filling, emptying, and drying out. The SMMWW settings based on the WSU amended soils.

Section 7 - Software Output

The following WWHM reports in this section represent individual sub-basin analysis for hydrologic flow evaluations. The following heading is common to all reports.

Western Washington Hydrology Model,

PROJECT REPORT

Project Name: Separated Cells 1010
Site Name: Dell's Nursery 104th
Site Address: 4131 104th Street NE
City : Marysville
Report Date: 10/10/2022
Gage : Everett
Data Start : 1948/10/01
Data End : 2009/09/30
Precip Scale: 1.20
Version Date: 2019/09/13
Version : 4.2.17

Low Flow Threshold for POC 1 : 50 Percent of the 2 Year

High Flow Threshold for POC 1: 50 year

PREDEVELOPED LAND USE

Name : Basin 1
Bypass: No

GroundWater: No

<u>Pervious Land Use</u>	<u>acre</u>
A B, Lawn, Flat	1.829

Pervious Total 1.829

<u>Impervious Land Use</u>	<u>acre</u>
-----------------------------------	--------------------

Impervious Total 0

Basin Total 1.829




Basin 1
1.83ac

Element Flows To:

Surface	Interflow	Groundwater
----------------	------------------	--------------------

MITIGATED LAND USE

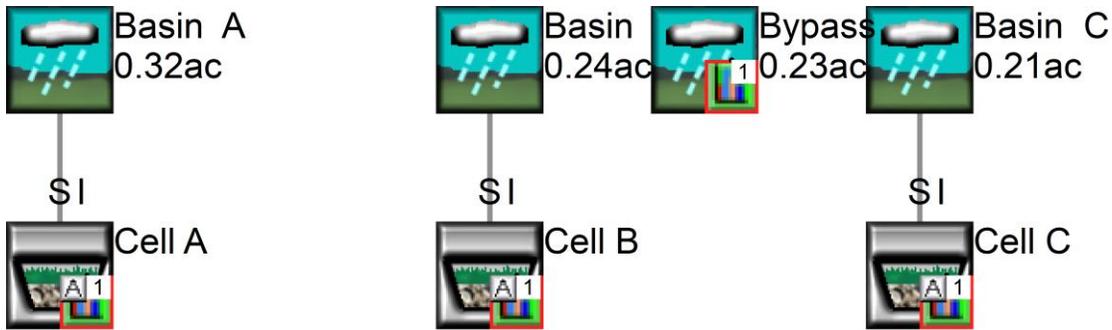

Name : Basin A
 Bypass: No

GroundWater: No

<u>Pervious Land Use</u>	<u>acre</u>
A B, Lawn, Flat	.04
Pervious Total	0.04
<u>Impervious Land Use</u>	<u>acre</u>
ROADS FLAT	0.258
SIDEWALKS FLAT	0.019
Impervious Total	0.277
Basin Total	0.317

Element Flows To:		
Surface	Interflow	Groundwater
Surface Cell A	Surface Cell A	

Name : Cell A
 Bottom Length: 140.00 ft.
 Bottom Width: 4.00 ft.
 Material thickness of first layer: 1.5
 Material type for first layer: SMMWW 12 in/hr
 Material thickness of second layer: 0.5
 Material type for second layer: Sand
 Material thickness of third layer: 2
 Material type for third layer: GRAVEL
 Infiltration On
 Infiltration rate: 4
 Infiltration safety factor: 1
 Total Volume Infiltrated (ac-ft.): 54.891
 Total Volume Through Riser (ac-ft.): 0.001
 Total Volume Through Facility (ac-ft.): 54.892
 Percent Infiltrated: 100
 Total Precip Applied to Facility: 2.736
 Total Evap From Facility: 1.46
 Underdrain not used

Discharge Structure

Riser Height: 1 ft.

Riser Diameter: 6 in.

Element Flows To:

Outlet 1

Outlet 2

Cell A Hydraulic Table

Stage(feet)	Area(ac.)	Volume(ac-ft.)	Discharge(cfs)	Infilt(cfs)
0.0000	0.0129	0.0000	0.0000	0.0000
0.0604	0.0129	0.0004	0.0000	0.0000
0.1209	0.0129	0.0007	0.0000	0.0000
0.1813	0.0129	0.0011	0.0000	0.0000
0.2418	0.0129	0.0014	0.0000	0.0000
0.3022	0.0129	0.0018	0.0000	0.0000
0.3626	0.0129	0.0021	0.0000	0.0013
0.4231	0.0129	0.0025	0.0000	0.0018
0.4835	0.0129	0.0028	0.0000	0.0022
0.5440	0.0129	0.0032	0.0000	0.0036
0.6044	0.0129	0.0036	0.0000	0.0053
0.6648	0.0129	0.0039	0.0000	0.0053
0.7253	0.0129	0.0043	0.0000	0.0076
0.7857	0.0129	0.0046	0.0000	0.0079
0.8462	0.0129	0.0050	0.0000	0.0103
0.9066	0.0129	0.0053	0.0000	0.0122
0.9670	0.0129	0.0057	0.0000	0.0135
1.0275	0.0129	0.0060	0.0000	0.0174
1.0879	0.0129	0.0064	0.0000	0.0196
1.1484	0.0129	0.0068	0.0000	0.0218
1.2088	0.0129	0.0071	0.0000	0.0229
1.2692	0.0129	0.0075	0.0000	0.0268
1.3297	0.0129	0.0078	0.0000	0.0325
1.3901	0.0129	0.0082	0.0000	0.0380
1.4505	0.0129	0.0085	0.0000	0.0382
1.5110	0.0129	0.0088	0.0000	0.0388
1.5714	0.0129	0.0091	0.0000	0.0459
1.6319	0.0129	0.0095	0.0000	0.0519
1.6923	0.0129	0.0098	0.0000	0.0519
1.7527	0.0129	0.0101	0.0000	0.0519
1.8132	0.0129	0.0104	0.0000	0.0519
1.8736	0.0129	0.0107	0.0000	0.0519
1.9341	0.0129	0.0110	0.0000	0.0519
1.9945	0.0129	0.0113	0.0000	0.0519
2.0549	0.0129	0.0116	0.0000	0.0519
2.1154	0.0129	0.0120	0.0000	0.0519
2.1758	0.0129	0.0123	0.0000	0.0519
2.2363	0.0129	0.0126	0.0000	0.0519
2.2967	0.0129	0.0129	0.0000	0.0519
2.3571	0.0129	0.0133	0.0000	0.0519
2.4176	0.0129	0.0136	0.0000	0.0519
2.4780	0.0129	0.0139	0.0000	0.0519
2.5385	0.0129	0.0142	0.0000	0.0519
2.5989	0.0129	0.0145	0.0000	0.0519
2.6593	0.0129	0.0149	0.0000	0.0519

2.7198	0.0129	0.0152	0.0000	0.0519
2.7802	0.0129	0.0155	0.0000	0.0519
2.8407	0.0129	0.0158	0.0000	0.0519
2.9011	0.0129	0.0162	0.0000	0.0519
2.9615	0.0129	0.0165	0.0000	0.0519
3.0220	0.0129	0.0168	0.0000	0.0519
3.0824	0.0129	0.0171	0.0000	0.0519
3.1429	0.0129	0.0175	0.0000	0.0519
3.2033	0.0129	0.0178	0.0000	0.0519
3.2637	0.0129	0.0181	0.0000	0.0519
3.3242	0.0129	0.0184	0.0000	0.0519
3.3846	0.0129	0.0187	0.0000	0.0519
3.4451	0.0129	0.0191	0.0000	0.0519
3.5055	0.0129	0.0194	0.0000	0.0519
3.5659	0.0129	0.0197	0.0000	0.0519
3.6264	0.0129	0.0200	0.0000	0.0519
3.6868	0.0129	0.0204	0.0000	0.0519
3.7473	0.0129	0.0207	0.0000	0.0519
3.8077	0.0129	0.0210	0.0000	0.0519
3.8681	0.0129	0.0213	0.0000	0.0519
3.9286	0.0129	0.0216	0.0000	0.0519
3.9890	0.0129	0.0220	0.0000	0.0519
4.0000	0.0129	0.0220	0.0000	0.0519

Surface Cell A Hydraulic Table

Stage(feet)	Area(ac.)	Volume(ac-ft.)	Discharge(cfs)	To Amended(cfs)	Wetted Surface
4.0000	0.0129	0.0220	0.0000	0.1556	0.0000
4.0604	0.0131	0.0228	0.0000	0.1556	0.0000
4.1209	0.0133	0.0236	0.0000	0.1681	0.0000
4.1813	0.0135	0.0244	0.0000	0.1744	0.0000
4.2418	0.0137	0.0252	0.0000	0.1806	0.0000
4.3022	0.0139	0.0261	0.0000	0.1869	0.0000
4.3626	0.0141	0.0269	0.0000	0.1932	0.0000
4.4231	0.0143	0.0278	0.0000	0.1994	0.0000
4.4835	0.0145	0.0286	0.0000	0.2057	0.0000
4.5440	0.0147	0.0295	0.0000	0.2120	0.0000
4.6044	0.0149	0.0304	0.0000	0.2182	0.0000
4.6648	0.0151	0.0313	0.0000	0.2245	0.0000
4.7253	0.0153	0.0322	0.0000	0.2308	0.0000
4.7857	0.0155	0.0331	0.0000	0.2370	0.0000
4.8462	0.0157	0.0341	0.0000	0.2433	0.0000
4.9066	0.0159	0.0350	0.0000	0.2496	0.0000
4.9670	0.0161	0.0360	0.0000	0.2558	0.0000
5.0275	0.0163	0.0370	0.0241	0.2621	0.0000
5.0879	0.0165	0.0380	0.1341	0.2684	0.0000
5.1484	0.0167	0.0390	0.2636	0.2746	0.0000
5.2088	0.0169	0.0400	0.3563	0.2809	0.0000
5.2692	0.0171	0.0410	0.4086	0.2872	0.0000
5.3297	0.0173	0.0421	0.4521	0.2934	0.0000
5.3901	0.0175	0.0431	0.4918	0.2997	0.0000
5.4505	0.0177	0.0442	0.5285	0.3060	0.0000
5.5000	0.0179	0.0451	0.5629	0.3111	0.0000

Name : Surface Cell A

Element Flows To:

Outlet 1 **Outlet 2**

Cell A

Name : Basin B

Bypass: No

GroundWater: No

<u>Pervious Land Use</u>	<u>acre</u>
A B, Lawn, Flat	.017
Pervious Total	0.017
<u>Impervious Land Use</u>	<u>acre</u>
ROADS FLAT	0.204
SIDEWALKS FLAT	0.015
Impervious Total	0.219
Basin Total	0.236

Element Flows To:

Surface	Interflow	Groundwater
Surface Cell B	Surface Cell B	

Name : Cell B

Bottom Length: 125.00 ft.

Bottom Width: 4.00 ft.

Material thickness of first layer: 1.5

Material type for first layer: SMMWW 12 in/hr

Material thickness of second layer: 0.5

Material type for second layer: Sand

Material thickness of third layer: 2

Material type for third layer: GRAVEL

Infiltration On

Infiltration rate: 4

Infiltration safety factor: 1

Total Volume Infiltrated (ac-ft.): 43.509

Total Volume Through Riser (ac-ft.): 0

Total Volume Through Facility (ac-ft.): 43.509

Percent Infiltrated: 100

Total Precip Applied to Facility: 2.439

Total Evap From Facility: 1.296

Underdrain not used

Discharge Structure

Riser Height: 1 ft.

Riser Diameter: 6 in.

Element Flows To:

Outlet 1	Outlet 2
----------	----------

Cell B Hydraulic Table

<u>Stage(feet)</u>	<u>Area(ac.)</u>	<u>Volume(ac-ft.)</u>	<u>Discharge(cfs)</u>	<u>Infilt(cfs)</u>
0.0000	0.0115	0.0000	0.0000	0.0000
0.0604	0.0115	0.0003	0.0000	0.0000
0.1209	0.0115	0.0006	0.0000	0.0000
0.1813	0.0115	0.0010	0.0000	0.0000
0.2418	0.0115	0.0013	0.0000	0.0000
0.3022	0.0115	0.0016	0.0000	0.0000
0.3626	0.0115	0.0019	0.0000	0.0011
0.4231	0.0115	0.0022	0.0000	0.0016
0.4835	0.0115	0.0025	0.0000	0.0020
0.5440	0.0115	0.0029	0.0000	0.0032
0.6044	0.0115	0.0032	0.0000	0.0047
0.6648	0.0115	0.0035	0.0000	0.0048
0.7253	0.0115	0.0038	0.0000	0.0068
0.7857	0.0115	0.0041	0.0000	0.0071
0.8462	0.0115	0.0044	0.0000	0.0092
0.9066	0.0115	0.0048	0.0000	0.0109
0.9670	0.0115	0.0051	0.0000	0.0121
1.0275	0.0115	0.0054	0.0000	0.0155
1.0879	0.0115	0.0057	0.0000	0.0175
1.1484	0.0115	0.0060	0.0000	0.0194
1.2088	0.0115	0.0063	0.0000	0.0204
1.2692	0.0115	0.0067	0.0000	0.0239
1.3297	0.0115	0.0070	0.0000	0.0290
1.3901	0.0115	0.0073	0.0000	0.0339
1.4505	0.0115	0.0076	0.0000	0.0341
1.5110	0.0115	0.0079	0.0000	0.0347
1.5714	0.0115	0.0082	0.0000	0.0410
1.6319	0.0115	0.0084	0.0000	0.0463
1.6923	0.0115	0.0087	0.0000	0.0463
1.7527	0.0115	0.0090	0.0000	0.0463
1.8132	0.0115	0.0093	0.0000	0.0463
1.8736	0.0115	0.0096	0.0000	0.0463
1.9341	0.0115	0.0098	0.0000	0.0463
1.9945	0.0115	0.0101	0.0000	0.0463
2.0549	0.0115	0.0104	0.0000	0.0463
2.1154	0.0115	0.0107	0.0000	0.0463
2.1758	0.0115	0.0110	0.0000	0.0463
2.2363	0.0115	0.0113	0.0000	0.0463
2.2967	0.0115	0.0116	0.0000	0.0463
2.3571	0.0115	0.0118	0.0000	0.0463
2.4176	0.0115	0.0121	0.0000	0.0463
2.4780	0.0115	0.0124	0.0000	0.0463
2.5385	0.0115	0.0127	0.0000	0.0463
2.5989	0.0115	0.0130	0.0000	0.0463
2.6593	0.0115	0.0133	0.0000	0.0463
2.7198	0.0115	0.0136	0.0000	0.0463
2.7802	0.0115	0.0139	0.0000	0.0463
2.8407	0.0115	0.0141	0.0000	0.0463
2.9011	0.0115	0.0144	0.0000	0.0463
2.9615	0.0115	0.0147	0.0000	0.0463
3.0220	0.0115	0.0150	0.0000	0.0463
3.0824	0.0115	0.0153	0.0000	0.0463
3.1429	0.0115	0.0156	0.0000	0.0463

3.2033	0.0115	0.0159	0.0000	0.0463
3.2637	0.0115	0.0162	0.0000	0.0463
3.3242	0.0115	0.0164	0.0000	0.0463
3.3846	0.0115	0.0167	0.0000	0.0463
3.4451	0.0115	0.0170	0.0000	0.0463
3.5055	0.0115	0.0173	0.0000	0.0463
3.5659	0.0115	0.0176	0.0000	0.0463
3.6264	0.0115	0.0179	0.0000	0.0463
3.6868	0.0115	0.0182	0.0000	0.0463
3.7473	0.0115	0.0185	0.0000	0.0463
3.8077	0.0115	0.0187	0.0000	0.0463
3.8681	0.0115	0.0190	0.0000	0.0463
3.9286	0.0115	0.0193	0.0000	0.0463
3.9890	0.0115	0.0196	0.0000	0.0463
4.0000	0.0115	0.0197	0.0000	0.0463

Surface Cell B Hydraulic Table

Stage(feet)	Area(ac.)	Volume(ac-ft.)	Discharge(cfs)	To Amended(cfs)	Wetted Surface
4.0000	0.0115	0.0197	0.0000	0.1389	0.0000
4.0604	0.0117	0.0204	0.0000	0.1389	0.0000
4.1209	0.0118	0.0211	0.0000	0.1501	0.0000
4.1813	0.0120	0.0218	0.0000	0.1557	0.0000
4.2418	0.0122	0.0225	0.0000	0.1613	0.0000
4.3022	0.0124	0.0233	0.0000	0.1669	0.0000
4.3626	0.0126	0.0240	0.0000	0.1725	0.0000
4.4231	0.0127	0.0248	0.0000	0.1781	0.0000
4.4835	0.0129	0.0256	0.0000	0.1837	0.0000
4.5440	0.0131	0.0263	0.0000	0.1893	0.0000
4.6044	0.0133	0.0271	0.0000	0.1949	0.0000
4.6648	0.0135	0.0280	0.0000	0.2004	0.0000
4.7253	0.0136	0.0288	0.0000	0.2060	0.0000
4.7857	0.0138	0.0296	0.0000	0.2116	0.0000
4.8462	0.0140	0.0304	0.0000	0.2172	0.0000
4.9066	0.0142	0.0313	0.0000	0.2228	0.0000
4.9670	0.0144	0.0322	0.0000	0.2284	0.0000
5.0275	0.0145	0.0330	0.0241	0.2340	0.0000
5.0879	0.0147	0.0339	0.1341	0.2396	0.0000
5.1484	0.0149	0.0348	0.2636	0.2452	0.0000
5.2088	0.0151	0.0357	0.3563	0.2508	0.0000
5.2692	0.0153	0.0366	0.4086	0.2564	0.0000
5.3297	0.0155	0.0376	0.4521	0.2620	0.0000
5.3901	0.0156	0.0385	0.4918	0.2676	0.0000
5.4505	0.0158	0.0395	0.5285	0.2732	0.0000
5.5000	0.0160	0.0402	0.5629	0.2778	0.0000

Name : Surface Cell B

Element Flows To:

Outlet 1 **Outlet 2**
 Cell B

Name : Basin C

Bypass: No

GroundWater: No

<u>Pervious Land Use</u>	<u>acre</u>
A B, Lawn, Flat	.017
Pervious Total	0.017
<u>Impervious Land Use</u>	<u>acre</u>
ROADS FLAT	0.182
SIDEWALKS FLAT	0.007
Impervious Total	0.189
Basin Total	0.206

Element Flows To:

Surface	Interflow	Groundwater
Surface Cell C	Surface Cell C	

Name : Cell C
 Bottom Length: 125.00 ft.
 Bottom Width: 4.00 ft.
 Material thickness of first layer: 1.5
 Material type for first layer: SMMWW 12 in/hr
 Material thickness of second layer: 0.5
 Material type for second layer: Sand
 Material thickness of third layer: 2
 Material type for third layer: GRAVEL
 Infiltration On
 Infiltration rate: 4
 Infiltration safety factor: 1
 Total Volume Infiltrated (ac-ft.): 37.706
 Total Volume Through Riser (ac-ft.): 0
 Total Volume Through Facility (ac-ft.): 37.706
 Percent Infiltrated: 100
 Total Precip Applied to Facility: 2.439
 Total Evap From Facility: 1.287
 Underdrain not used
Discharge Structure
 Riser Height: 1 ft.
 Riser Diameter: 6 in.

Element Flows To:
 Outlet 1 Outlet 2

Cell C Hydraulic Table

<u>Stage(feet)</u>	<u>Area(ac.)</u>	<u>Volume(ac-ft.)</u>	<u>Discharge(cfs)</u>	<u>Infilt(cfs)</u>
0.0000	0.0115	0.0000	0.0000	0.0000
0.0604	0.0115	0.0003	0.0000	0.0000
0.1209	0.0115	0.0006	0.0000	0.0000

0.1813	0.0115	0.0010	0.0000	0.0000
0.2418	0.0115	0.0013	0.0000	0.0000
0.3022	0.0115	0.0016	0.0000	0.0000
0.3626	0.0115	0.0019	0.0000	0.0011
0.4231	0.0115	0.0022	0.0000	0.0016
0.4835	0.0115	0.0025	0.0000	0.0020
0.5440	0.0115	0.0029	0.0000	0.0032
0.6044	0.0115	0.0032	0.0000	0.0047
0.6648	0.0115	0.0035	0.0000	0.0048
0.7253	0.0115	0.0038	0.0000	0.0068
0.7857	0.0115	0.0041	0.0000	0.0071
0.8462	0.0115	0.0044	0.0000	0.0092
0.9066	0.0115	0.0048	0.0000	0.0109
0.9670	0.0115	0.0051	0.0000	0.0121
1.0275	0.0115	0.0054	0.0000	0.0155
1.0879	0.0115	0.0057	0.0000	0.0175
1.1484	0.0115	0.0060	0.0000	0.0194
1.2088	0.0115	0.0063	0.0000	0.0204
1.2692	0.0115	0.0067	0.0000	0.0239
1.3297	0.0115	0.0070	0.0000	0.0290
1.3901	0.0115	0.0073	0.0000	0.0339
1.4505	0.0115	0.0076	0.0000	0.0341
1.5110	0.0115	0.0079	0.0000	0.0347
1.5714	0.0115	0.0082	0.0000	0.0410
1.6319	0.0115	0.0084	0.0000	0.0463
1.6923	0.0115	0.0087	0.0000	0.0463
1.7527	0.0115	0.0090	0.0000	0.0463
1.8132	0.0115	0.0093	0.0000	0.0463
1.8736	0.0115	0.0096	0.0000	0.0463
1.9341	0.0115	0.0098	0.0000	0.0463
1.9945	0.0115	0.0101	0.0000	0.0463
2.0549	0.0115	0.0104	0.0000	0.0463
2.1154	0.0115	0.0107	0.0000	0.0463
2.1758	0.0115	0.0110	0.0000	0.0463
2.2363	0.0115	0.0113	0.0000	0.0463
2.2967	0.0115	0.0116	0.0000	0.0463
2.3571	0.0115	0.0118	0.0000	0.0463
2.4176	0.0115	0.0121	0.0000	0.0463
2.4780	0.0115	0.0124	0.0000	0.0463
2.5385	0.0115	0.0127	0.0000	0.0463
2.5989	0.0115	0.0130	0.0000	0.0463
2.6593	0.0115	0.0133	0.0000	0.0463
2.7198	0.0115	0.0136	0.0000	0.0463
2.7802	0.0115	0.0139	0.0000	0.0463
2.8407	0.0115	0.0141	0.0000	0.0463
2.9011	0.0115	0.0144	0.0000	0.0463
2.9615	0.0115	0.0147	0.0000	0.0463
3.0220	0.0115	0.0150	0.0000	0.0463
3.0824	0.0115	0.0153	0.0000	0.0463
3.1429	0.0115	0.0156	0.0000	0.0463
3.2033	0.0115	0.0159	0.0000	0.0463
3.2637	0.0115	0.0162	0.0000	0.0463
3.3242	0.0115	0.0164	0.0000	0.0463
3.3846	0.0115	0.0167	0.0000	0.0463
3.4451	0.0115	0.0170	0.0000	0.0463
3.5055	0.0115	0.0173	0.0000	0.0463
3.5659	0.0115	0.0176	0.0000	0.0463
3.6264	0.0115	0.0179	0.0000	0.0463

3.6868	0.0115	0.0182	0.0000	0.0463
3.7473	0.0115	0.0185	0.0000	0.0463
3.8077	0.0115	0.0187	0.0000	0.0463
3.8681	0.0115	0.0190	0.0000	0.0463
3.9286	0.0115	0.0193	0.0000	0.0463
3.9890	0.0115	0.0196	0.0000	0.0463
4.0000	0.0115	0.0197	0.0000	0.0463

Surface Cell C Hydraulic Table

<u>Stage(feet)</u>	<u>Area(ac.)</u>	<u>Volume(ac-ft.)</u>	<u>Discharge(cfs)</u>	<u>To Amended(cfs)</u>	<u>Wetted Surface</u>
4.0000	0.0115	0.0197	0.0000	0.1389	0.0000
4.0604	0.0117	0.0204	0.0000	0.1389	0.0000
4.1209	0.0118	0.0211	0.0000	0.1501	0.0000
4.1813	0.0120	0.0218	0.0000	0.1557	0.0000
4.2418	0.0122	0.0225	0.0000	0.1613	0.0000
4.3022	0.0124	0.0233	0.0000	0.1669	0.0000
4.3626	0.0126	0.0240	0.0000	0.1725	0.0000
4.4231	0.0127	0.0248	0.0000	0.1781	0.0000
4.4835	0.0129	0.0256	0.0000	0.1837	0.0000
4.5440	0.0131	0.0263	0.0000	0.1893	0.0000
4.6044	0.0133	0.0271	0.0000	0.1949	0.0000
4.6648	0.0135	0.0280	0.0000	0.2004	0.0000
4.7253	0.0136	0.0288	0.0000	0.2060	0.0000
4.7857	0.0138	0.0296	0.0000	0.2116	0.0000
4.8462	0.0140	0.0304	0.0000	0.2172	0.0000
4.9066	0.0142	0.0313	0.0000	0.2228	0.0000
4.9670	0.0144	0.0322	0.0000	0.2284	0.0000
5.0275	0.0145	0.0330	0.0241	0.2340	0.0000
5.0879	0.0147	0.0339	0.1341	0.2396	0.0000
5.1484	0.0149	0.0348	0.2636	0.2452	0.0000
5.2088	0.0151	0.0357	0.3563	0.2508	0.0000
5.2692	0.0153	0.0366	0.4086	0.2564	0.0000
5.3297	0.0155	0.0376	0.4521	0.2620	0.0000
5.3901	0.0156	0.0385	0.4918	0.2676	0.0000
5.4505	0.0158	0.0395	0.5285	0.2732	0.0000
5.5000	0.0160	0.0402	0.5629	0.2778	0.0000

Name : Surface Cell C

Element Flows To:

Outlet 1 **Outlet 2**
 Cell C

Name : Bypass

Bypass: Yes

GroundWater: No

Pervious Land Use acre
 A B, Lawn, Flat .17

Pervious Total **0.17**

Impervious Land Use acre
 SIDEWALKS FLAT 0.059

Impervious Total 0.059
 Basin Total 0.229

Element Flows To:
 Surface Interflow Groundwater

ANALYSIS RESULTS

Stream Protection Duration

Predeveloped Landuse Totals for POC #1
 Total Pervious Area:1.829
 Total Impervious Area:0

Mitigated Landuse Totals for POC #1
 Total Pervious Area:0.244
 Total Impervious Area:0.744

Flow Frequency Return Periods for Predeveloped. POC #1

<u>Return Period</u>	<u>Flow(cfs)</u>
2 year	0.064215
5 year	0.171557
10 year	0.267702
25 year	0.409639
50 year	0.525482
100 year	0.646623

Flow Frequency Return Periods for Mitigated. POC #1

<u>Return Period</u>	<u>Flow(cfs)</u>
2 year	0.035671
5 year	0.051219
10 year	0.062874
25 year	0.07921
50 year	0.092592
100 year	0.107049

Stream Protection Duration

POC #1
 The Facility PASSED

The Facility **PASSED.**

Flow(cfs)	Predev	Mit	Percentage	Pass/Fail
0.0321	298	124	41	Pass

0.0371	264	81	30	Pass
0.0421	233	52	22	Pass
0.0471	215	33	15	Pass
0.0520	192	23	11	Pass
0.0570	171	17	9	Pass
0.0620	157	9	5	Pass
0.0670	149	7	4	Pass
0.0720	132	6	4	Pass
0.0770	128	3	2	Pass
0.0819	113	2	1	Pass
0.0869	105	2	1	Pass
0.0919	94	1	1	Pass
0.0969	89	1	1	Pass
0.1019	85	0	0	Pass
0.1069	78	0	0	Pass
0.1118	74	0	0	Pass
0.1168	68	0	0	Pass
0.1218	60	0	0	Pass
0.1268	55	0	0	Pass
0.1318	51	0	0	Pass
0.1368	50	0	0	Pass
0.1417	45	0	0	Pass
0.1467	42	0	0	Pass
0.1517	40	0	0	Pass
0.1567	38	0	0	Pass
0.1617	36	0	0	Pass
0.1667	32	0	0	Pass
0.1716	31	0	0	Pass
0.1766	29	0	0	Pass
0.1816	26	0	0	Pass
0.1866	25	0	0	Pass
0.1916	25	0	0	Pass
0.1966	24	0	0	Pass
0.2015	22	0	0	Pass
0.2065	22	0	0	Pass
0.2115	19	0	0	Pass
0.2165	18	0	0	Pass
0.2215	16	0	0	Pass
0.2265	16	0	0	Pass
0.2315	15	0	0	Pass
0.2364	15	0	0	Pass
0.2414	14	0	0	Pass
0.2464	12	0	0	Pass
0.2514	11	0	0	Pass
0.2564	10	0	0	Pass
0.2614	10	0	0	Pass
0.2663	9	0	0	Pass
0.2713	9	0	0	Pass
0.2763	8	0	0	Pass
0.2813	8	0	0	Pass
0.2863	7	0	0	Pass
0.2913	7	0	0	Pass
0.2962	7	0	0	Pass
0.3012	7	0	0	Pass
0.3062	6	0	0	Pass
0.3112	5	0	0	Pass
0.3162	5	0	0	Pass
0.3212	5	0	0	Pass

0.3261	5	0	0	Pass
0.3311	5	0	0	Pass
0.3361	5	0	0	Pass
0.3411	4	0	0	Pass
0.3461	4	0	0	Pass
0.3511	3	0	0	Pass
0.3560	3	0	0	Pass
0.3610	3	0	0	Pass
0.3660	3	0	0	Pass
0.3710	3	0	0	Pass
0.3760	3	0	0	Pass
0.3810	3	0	0	Pass
0.3859	3	0	0	Pass
0.3909	3	0	0	Pass
0.3959	3	0	0	Pass
0.4009	3	0	0	Pass
0.4059	2	0	0	Pass
0.4109	2	0	0	Pass
0.4158	2	0	0	Pass
0.4208	2	0	0	Pass
0.4258	2	0	0	Pass
0.4308	2	0	0	Pass
0.4358	2	0	0	Pass
0.4408	2	0	0	Pass
0.4457	1	0	0	Pass
0.4507	0	0	0	Pass
0.4557	0	0	0	Pass
0.4607	0	0	0	Pass
0.4657	0	0	0	Pass
0.4707	0	0	0	Pass
0.4756	0	0	0	Pass
0.4806	0	0	0	Pass
0.4856	0	0	0	Pass
0.4906	0	0	0	Pass
0.4956	0	0	0	Pass
0.5006	0	0	0	Pass
0.5055	0	0	0	Pass
0.5105	0	0	0	Pass
0.5155	0	0	0	Pass
0.5205	0	0	0	Pass
0.5255	0	0	0	Pass