

March 15, 2022

JULTIM, LLC C/O James G. Murphy Company Attn: Tim Murphy tim@murphyauction.com

### **RE:** Geotechnical Evaluation

Proposed Parking Lot Areas 3803 136<sup>th</sup> Street NE Parcel No. 30050400200500 Marysville, Washington

In accordance with your authorization, Cobalt Geosciences, LLC has prepared this letter to discuss the results of our geotechnical evaluation at the referenced site.

The purpose of our evaluation was to provide recommendations for stormwater management, grading, and earthwork.

# Site Description

The site is located at 3803 136<sup>th</sup> Street NE in Marysville, Washington. The site consists of one irregularly shaped parcel (No.30050400200500) with a total area of about 5.73 acres.

The southeast portion of the property is developed with a commercial building and parking lot area. The remainder of the site is undeveloped and vegetated with grasses, blackberry vines, bushes, and sparse trees.

The site is nearly level to slightly undulating with relief of about 5 feet. The building pad and parking lot areas are 2 to 3 feet higher than the remainder of the property (built up with fill).

The site is bordered to the north and east by commercial properties, to the south by 136<sup>th</sup> Street NE, and to the west by Smokey Point Boulevard.

The proposed development includes new gravel parking/staging areas throughout the currently vegetated portions of the site. This will likely require placement of 2 to 4 feet of fill over the existing site elevations. Stormwater will be managed using shallow infiltration systems and/or detention.

### **Area Geology**

The <u>Geologic Map of The Marysville Quadrangle</u> indicates that the site is underlain by Vashon Recessional Outwash – Marysville Sand Member.

These deposits include normally consolidated sands with areas of gravel and local silt/clay interbeds. These materials are often highly permeable.

February 5, 2022 Page 2 of 10 Geotechnical Evaluation

### **Soil & Groundwater Conditions**

As part of our evaluation, we excavated two test pits and three hand borings within the property, where accessible.

All of the explorations encountered approximately 6 inches of grass and topsoil underlain by about 2.5 to 3.5 feet of loose to medium dense, silty-fine to medium grained sand trace gravel (Weathered Marysville Sand). This layer was underlain by medium dense, fine to medium grained sand trace gravel and silt (Marysville Sand), which continued to the termination depths of the test pits.

Groundwater was encountered approximately 2.25 to 2.75 feet below grade in the explorations. Groundwater levels during the summer months will likely be several feet lower than the current levels, which could be considered the seasonal high since our explorations took place on March 3, 2022 which is in the wet season. We observed standing water in the southwest portion of the site, in a lower elevation area.

Water table elevations often fluctuate over time. The groundwater level will depend on a variety of factors that may include seasonal precipitation, irrigation, land use, climatic conditions and soil permeability. Water levels at the time of the field investigation may be different from those encountered during the construction phase of the project.

#### **Erosion Hazard**

The <u>Natural Resources Conservation Services</u> (NRCS) maps for Snohomish County indicate that the site is underlain by Custer fine sandy loam and Norma loam. These soils would have a slight to moderate erosion potential in a disturbed state depending on the slope magnitude.

It is our opinion that soil erosion potential at this project site can be reduced through landscaping and surface water runoff control. Typically, erosion of exposed soils will be most noticeable during periods of rainfall and may be controlled by the use of normal temporary erosion control measures, such as silt fences, hay bales, mulching, control ditches and diversion trenches. The typical wet weather season, with regard to site grading, is from October 31<sup>st</sup> to April 1<sup>st</sup>. Erosion control measures should be in place before the onset of wet weather.

### **Seismic Hazard**

The overall subsurface profile corresponds to a Site Class D as defined by Table 1613.5.2 of the International Building Code (IBC). A Site Class D applies to an overall profile consisting of stiff/medium dense soils within the upper 100 feet.

We referenced the U.S. Geological Survey (USGS) Earthquake Hazards Program Website to obtain values for  $S_S$ ,  $S_I$ ,  $F_a$ , and  $F_v$ . The USGS website includes the most updated published data on seismic conditions. The following tables provide seismic parameters from the USGS web site with referenced parameters from ASCE 7-16.

Seismic Design Parameters (ASCE 7-16)

Site Class	Spectral Acceleration at 0.2 sec. (g)	Spectral Acceleration at 1.0 sec. (g)	Si Coeffi		Design Response	Design PGA	
			Fa	$F_{v}$	$\mathbf{S}_{ ext{DS}}$	$S_{\mathrm{D1}}$	
D	1.083	0.387	1.067	Null	0.77	Null	0.459

Additional seismic considerations include liquefaction potential and amplification of ground motions by soft/loose soil deposits. The liquefaction potential is highest for loose sand with a high groundwater table. The site may have some potential for liquefaction; however, the project does not include new habitable structures. Mitigation is not warranted at this time. For items listed as "Null" see Section 11.4.8 of the ASCE.

# **Conclusions and Recommendations**

#### General

The site is underlain by Marysville Sand which becomes medium dense or firmer within about 4 feet of the ground surface. The proposed gravel parking lot may be supported on new structural fills with gravel surfacing following removal of topsoil and vegetation.

The upper weathered Marysville Sand (above the groundwater table) is generally suitable for infiltration of surface water, if proposed. We can provide specific details once a site plan with information regarding the specific systems has been prepared.

## **Site Preparation**

Trees, shrubs and other vegetation should be removed prior to stripping of surficial organic-rich soil and fill. Based on observations from the site investigation program, it is anticipated that the stripping depth will be 6 to 18 inches. Deeper excavations will be necessary below any larger trees and in any areas underlain by undocumented fill.

The native soils consist of silty-sand and poorly graded sand. Most of the native soils may be used as structural fill provided they achieve compaction requirements and are within 3 percent of the optimum moisture. Some of these soils may only be suitable for use as fill during the summer months, as they will be above the optimum moisture levels in their current state. These soils are variably moisture sensitive and may degrade during periods of wet weather and under equipment traffic.

Imported structural fill should consist of a sand and gravel mixture with a maximum grain size of 3 inches and less than 5 percent fines (material passing the U.S. Standard No. 200 Sieve). Structural fill should be placed in maximum lift thicknesses of 12 inches and should be compacted to a minimum of 95 percent of the modified proctor maximum dry density, as determined by the ASTM D 1557 test method.

# **Temporary Excavations**

We do not anticipate the need for any temporary excavations. If any are proposed for utilities, the following recommendations may apply. Temporary excavations should be sloped no steeper than 1.5H:1V (Horizontal:Vertical) in loose native soils and 1H:1V in medium dense native soils. If an excavation is subject to heavy vibration or surcharge loads, we recommend that the excavations be sloped no steeper than 2H:1V, where room permits. Excavations below the groundwater table may not be possible without temporary shoring such as sheet piles. We can provide additional input if this is proposed.

Temporary cuts should be in accordance with the Washington Administrative Code (WAC) Part N, Excavation, Trenching, and Shoring. Temporary slopes should be visually inspected daily by a qualified person during construction activities and the inspections should be documented in daily reports. The contractor is responsible for maintaining the stability of the temporary cut slopes and reducing slope erosion during construction.

Temporary cut slopes should be covered with visqueen to help reduce erosion during wet weather, and the slopes should be closely monitored until the permanent retaining systems or slope configurations are complete. Materials should not be stored or equipment operated within 10 feet of the top of any temporary cut slope.

Soil conditions may not be completely known from the geotechnical investigation. In the case of temporary cuts, the existing soil conditions may not be completely revealed until the excavation work exposes the soil. Typically, as excavation work progresses the maximum inclination of temporary slopes will need to be re-evaluated by the geotechnical engineer so that supplemental recommendations can be made. Soil and groundwater conditions can be highly variable. Scheduling for soil work will need to be adjustable, to deal with unanticipated conditions, so that the project can proceed and required deadlines can be met.

If any variations or undesirable conditions are encountered during construction, we should be notified so that supplemental recommendations can be made. If room constraints or groundwater conditions do not permit temporary slopes to be cut to the maximum angles allowed by the WAC, temporary shoring systems may be required. The contractor should be responsible for developing temporary shoring systems, if needed. We recommend that Cobalt Geosciences and the project structural engineer review temporary shoring designs prior to installation, to verify the suitability of the proposed systems.

## **Foundation Design**

We are not aware of any new habitable structures; however, a detention vault may be proposed. If a vault or other structures are proposed, the following recommendations apply.

New vaults or other structures may be supported on shallow spread footing foundation systems bearing on undisturbed dense or firmer native soils or on properly compacted structural fill placed on the suitable native soils. Any undocumented fill and/or loose native soils should be removed and replaced with structural fill below foundation elements. Structural fill below footings should consist of clean angular rock 5/8 to 4 inches in size. We should verify soil conditions during foundation excavation work. The near surface soils will likely require recompaction at foundation subgrade elevations.

For shallow foundation support, we recommend widths of at least 16 and 24 inches, respectively, for continuous wall and isolated column footings supporting the proposed structure. Provided that the footings are supported as recommended above, a net allowable bearing pressure of 2,000 pounds per square foot (psf) may be used for design.

A 1/3 increase in the above value may be used for short duration loads, such as those imposed by wind and seismic events. Structural fill placed on bearing, native subgrade should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. Footing excavations should be inspected to verify that the foundations will bear on suitable material.

Exterior footings should have a minimum depth of 18 inches below pad subgrade (soil grade) or adjacent exterior grade, whichever is lower. Interior footings should have a minimum depth of 12 inches below pad subgrade (soil grade) or adjacent exterior grade, whichever is lower.

If constructed as recommended, the total foundation settlement is not expected to exceed 1 inch. Differential settlement, along a 25-foot exterior wall footing, or between adjoining column footings, should be less than ½ inch. This translates to an angular distortion of 0.002. Most settlement is expected to occur during construction, as the loads are applied. However, additional post-construction settlement may occur if the foundation soils are flooded or saturated. All footing excavations should be observed by a qualified geotechnical consultant.

Resistance to lateral footing displacement can be determined using an allowable friction factor of 0.40 acting between the base of foundations and the supporting subgrades. Lateral resistance for footings can also be developed using an allowable equivalent fluid passive pressure of 225 pounds per cubic foot (pcf) acting against the appropriate vertical footing faces (neglect the upper 12 inches below grade in exterior areas). The frictional and passive resistance of the soil may be combined without reduction in determining the total lateral resistance.

Care should be taken to prevent wetting or drying of the bearing materials during construction. Any extremely wet or dry materials, or any loose or disturbed materials at the bottom of the footing excavations, should be removed prior to placing concrete. The potential for wetting or drying of the bearing materials can be reduced by pouring concrete as soon as possible after completing the footing excavation and evaluating the bearing surface by the geotechnical engineer or his representative.

## **Concrete Retaining Walls**

The following table, titled **Wall Design Criteria**, presents the recommended soil related design parameters for retaining walls with a level backslope. Contact Cobalt if an alternate retaining wall system is used. This has been included for below grade vaults, if proposed.

Wall Design Criteria											
"At-rest" Conditions (Lateral Earth Pressure – EFD+)	55 pcf (Equivalent Fluid Density)										
"Active" Conditions (Lateral Earth Pressure – EFD+)	35 pcf (Equivalent Fluid Density)										
Seismic Increase for "At-rest" Conditions (Lateral Earth Pressure) 18H* (Uniform Distribution) 1 in 2,500 event											
Seismic Increase for "At-rest" Conditions (Lateral Earth Pressure)	12H* (Uniform Distribution) 1 in 500 year event										

Seismic Increase for "Active" Conditions (Lateral Earth Pressure)	6H* (Uniform Distribution)
Passive Earth Pressure on Low Side of Wall (Allowable, includes F.S. = 1.5)	Neglect upper 2 feet, then 250 pcf EFD <sup>+</sup>
Soil-Footing Coefficient of Sliding Friction (Allowable; includes F.S. = 1.5)	0.40

\*H is the height of the wall; Increase based on one in 500 year seismic event (10 percent probability of being exceeded in years),

+EFD - Equivalent Fluid Density

The stated lateral earth pressures do not include the effects of hydrostatic pressure generated by water accumulation behind the retaining walls. Uniform horizontal lateral active and at-rest pressures on the retaining walls from vertical surcharges behind the wall may be calculated using active and at-rest lateral earth pressure coefficients of 0.3 and 0.5, respectively. A soil unit weight of 125 pcf may be used to calculate vertical earth surcharges.

To reduce the potential for the buildup of water pressure against the walls, continuous footing drains (with cleanouts) should be provided at the bases of the walls. The footing drains should consist of a minimum 4-inch diameter perforated pipe, sloped to drain, with perforations placed down and enveloped by a minimum 6 inches of pea gravel in all directions.

The backfill adjacent to and extending a lateral distance behind the walls at least 2 feet should consist of free-draining granular material. All free draining backfill should contain less than 3 percent fines (passing the U.S. Standard No. 200 Sieve) based upon the fraction passing the U.S. Standard No. 4 Sieve with at least 30 percent of the material being retained on the U.S. Standard No. 4 Sieve. The primary purpose of the free-draining material is the reduction of hydrostatic pressure. Some potential for the moisture to contact the back face of the wall may exist, even with treatment, which may require that more extensive waterproofing be specified for walls, which require interior moisture sensitive finishes.

We recommend that the backfill be compacted to at least 90 percent of the maximum dry density based on ASTM Test Method D1557. In place density tests should be performed to verify adequate compaction. Soil compactors place transient surcharges on the backfill. Consequently, only light hand operated equipment is recommended within 3 feet of walls so that excessive stress is not imposed on the walls.

## Stormwater Management Feasibility

The site is underlain by Marysville Sand member of Vashon Recessional Outwash. Infiltration is suitable in these soil deposits above the groundwater. Groundwater was observed about 2.25 to 2.75 feet below grade during our exploration work. This likely represents the seasonal high groundwater table.

Because the recessional deposits have not been overridden by glacial ice, this soil unit is considered normally-consolidated. The Washington State Department of Ecology 2019 Stormwater Management Manual for Western Washington allows determination of infiltration rates of this soil unit by Soil Particle Size Distribution testing. This method involves using a logarithmic equation and grain size values along with correction factors for testing type, soil homogeneity, and influent control.

February 5, 2022 Page 7 of 10 Geotechnical Evaluation

The equation in conjunction with sieve analysis results yields a design rate of 2.8 inches per hour at 1.25 feet below site elevations, in the weathered outwash. These rates reflect application of correction factors for variability (0.8 used), influent control (0.9), and testing analysis type (0.4). We should be provided with the final civil plans so that we may provide specific infiltration rates at specific system locations and depths. This may require additional site sampling at system locations and elevations.

If utilized, infiltration systems will likely require a minimum clearance above the groundwater table. If utilized, any fine grained soils or interbeds of fine grained soils must be removed prior to rock placement in infiltration system areas.

We should be provided with final plans for review to determine if the intent of our recommendations has been incorporated or if additional modifications are needed. Verification testing of infiltration systems should be performed during construction by the geotechnical engineer.

#### Slab-on-Grade

We are not aware of new slabs; however, we have included this information if necessary. We recommend that the upper 18 inches of the native soils within slab areas be re-compacted to at least 95 percent of the modified proctor (ASTM D1557 Test Method).

Often, a vapor barrier is considered below concrete slab areas. However, the usage of a vapor barrier could result in curling of the concrete slab at joints. Floor covers sensitive to moisture typically requires the usage of a vapor barrier. A materials or structural engineer should be consulted regarding the detailing of the vapor barrier below concrete slabs. Exterior slabs typically do not utilize vapor barriers.

The American Concrete Institutes ACI 360R-06 Design of Slabs on Grade and ACI 302.1R-04 Guide for Concrete Floor and Slab Construction are recommended references for vapor barrier selection and floor slab detailing.

Slabs on grade may be designed using a coefficient of subgrade reaction of 210 pounds per cubic inch (pci) assuming the slab-on-grade base course is underlain by structural fill placed and compacted as outlined above. A 4- to 6-inch-thick capillary break layer should be placed over the prepared subgrade. This material should consist of pea gravel or 5/8 inch clean angular rock.

A perimeter drainage system is recommended unless interior slab areas are elevated a minimum of 12 inches above adjacent exterior grades. If installed, a perimeter drainage system should consist of a 4-inch diameter perforated drain pipe surrounded by a minimum 6 inches of drain rock wrapped in a non-woven geosynthetic filter fabric to reduce migration of soil particles into the drainage system. The perimeter drainage system should discharge by gravity flow to a suitable stormwater system.

Exterior grades surrounding buildings should be sloped at a minimum of one percent to facilitate surface water flow away from the building and preferably with a relatively impermeable surface cover immediately adjacent to the building.

#### **Erosion and Sediment Control**

Erosion and sediment control (ESC) is used to reduce the transportation of eroded sediment to wetlands, streams, lakes, drainage systems, and adjacent properties. Erosion and sediment control measures should be implemented, and these measures should be in general accordance with local regulations. At a minimum, the following basic recommendations should be incorporated into the design of the erosion and sediment control features for the site:

- Schedule the soil, foundation, utility, and other work requiring excavation or the disturbance of the site soils, to take place during the dry season (generally May through September). However, provided precautions are taken using Best Management Practices (BMP's), grading activities can be completed during the wet season (generally October through April).
- All site work should be completed and stabilized as quickly as possible.
- Additional perimeter erosion and sediment control features may be required to reduce the
  possibility of sediment entering the surface water. This may include additional silt fences, silt
  fences with a higher Apparent Opening Size (AOS), construction of a berm, or other filtration
  systems.
- Any runoff generated by dewatering discharge should be treated through construction of a sediment trap if there is sufficient space. If space is limited other filtration methods will need to be incorporated.

#### **Utilities**

Utility trenches should be excavated according to accepted engineering practices following OSHA (Occupational Safety and Health Administration) standards, by a contractor experienced in such work. The contractor is responsible for the safety of open trenches. Traffic and vibration adjacent to trench walls should be reduced; cyclic wetting and drying of excavation side slopes should be avoided. Depending upon the location and depth of some utility trenches, groundwater flow into open excavations could be experienced, especially during or shortly following periods of precipitation.

In general, sandy soils were encountered at shallow depths in the explorations at this site. These soils have low cohesion and density and will have a tendency to cave or slough in excavations. Shoring or sloping back trench sidewalls is required within these soils in excavations greater than 4 feet deep.

All utility trench backfill should consist of imported structural fill or suitable on site soils. Utility trench backfill placed in or adjacent to buildings and exterior slabs should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. The upper 5 feet of utility trench backfill placed in pavement areas should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. Below 5 feet, utility trench backfill in pavement areas should be compacted to at least 90 percent of the maximum dry density based on ASTM Test Method D1557. Pipe bedding should be in accordance with the pipe manufacturer's recommendations.

The contractor is responsible for removing all water-sensitive soils from the trenches regardless of the backfill location and compaction requirements. Depending on the depth and location of the proposed utilities, we anticipate the need to re-compact existing fill soils below the utility structures and pipes. The contractor should use appropriate equipment and methods to avoid damage to the utilities and/or structures during fill placement and compaction procedures.

### CONSTRUCTION FIELD REVIEWS

Cobalt Geosciences should be retained to provide part time field review during construction in order to verify that the soil conditions encountered are consistent with our design assumptions and that the intent of our recommendations is being met. This will require field and engineering review to:

- Monitor and test structural fill placement and soil compaction
- Observe bearing capacity at foundation locations if proposed
- Observe slab-on-grade preparation if utilized
- Verify infiltration system soil conditions if utilized
- Observe proofrolls of parking lot areas
- Monitor foundation drainage placement if proposed
- Observe excavation stability

Geotechnical design services should also be anticipated during the subsequent final design phase to support the structural design and address specific issues arising during this phase. Field and engineering review services will also be required during the construction phase in order to provide a Final Letter for the project.

#### CLOSURE

This report was prepared for the exclusive use of JULTIM LLC appointed consultants. Any use of this report or the material contained herein by third parties, or for other than the intended purpose, should first be approved in writing by Cobalt Geosciences, LLC.

The recommendations contained in this report are based on assumed continuity of soils with those of our test holes and assumed structural loads. Cobalt Geosciences should be provided with final architectural and civil drawings when they become available in order that we may review our design recommendations and advise of any revisions, if necessary.

Use of this report is subject to the Statement of General Conditions provided in Appendix A. It is the responsibility of JULTIM LLC who is identified as "the Client" within the Statement of General Conditions, and its agents to review the conditions and to notify Cobalt Geosciences should any of these not be satisfied.

Sincerely,

## Cobalt Geosciences, LLC



3/15/2022 Phil Haberman, PE, LG, LEG Principal

February 5, 2022 Page 10 of 10 Geotechnical Evaluation

### **Statement of General Conditions**

**USE OF THIS REPORT:** This report has been prepared for the sole benefit of the Client or its agent and may not be used by any third party without the express written consent of Cobalt Geosciences and the Client. Any use which a third party makes of this report is the responsibility of such third party.

**BASIS OF THE REPORT:** The information, opinions, and/or recommendations made in this report are in accordance with Cobalt Geosciences present understanding of the site specific project as described by the Client. The applicability of these is restricted to the site conditions encountered at the time of the investigation or study. If the proposed site specific project differs or is modified from what is described in this report or if the site conditions are altered, this report is no longer valid unless Cobalt Geosciences is requested by the Client to review and revise the report to reflect the differing or modified project specifics and/or the altered site conditions.

**STANDARD OF CARE:** Preparation of this report, and all associated work, was carried out in accordance with the normally accepted standard of care in the state of execution for the specific professional service provided to the Client. No other warranty is made.

**INTERPRETATION OF SITE CONDITIONS:** Soil, rock, or other material descriptions, and statements regarding their condition, made in this report are based on site conditions encountered by Cobalt Geosciences at the time of the work and at the specific testing and/or sampling locations. Classifications and statements of condition have been made in accordance with normally accepted practices which are judgmental in nature; no specific description should be considered exact, but rather reflective of the anticipated material behavior. Extrapolation of in situ conditions can only be made to some limited extent beyond the sampling or test points. The extent depends on variability of the soil, rock and groundwater conditions as influenced by geological processes, construction activity, and site use.

**VARYING OR UNEXPECTED CONDITIONS:** Should any site or subsurface conditions be encountered that are different from those described in this report or encountered at the test locations, Cobalt Geosciences must be notified immediately to assess if the varying or unexpected conditions are substantial and if reassessments of the report conclusions or recommendations are required. Cobalt Geosciences will not be responsible to any party for damages incurred as a result of failing to notify Cobalt Geosciences that differing site or sub-surface conditions are present upon becoming aware of such conditions.

**PLANNING, DESIGN, OR CONSTRUCTION:** Development or design plans and specifications should be reviewed by Cobalt Geosciences, sufficiently ahead of initiating the next project stage (property acquisition, tender, construction, etc), to confirm that this report completely addresses the elaborated project specifics and that the contents of this report have been properly interpreted. Specialty quality assurance services (field observations and testing) during construction are a necessary part of the evaluation of sub-subsurface conditions and site preparation works. Site work relating to the recommendations included in this report should only be carried out in the presence of a qualified geotechnical engineer; Cobalt Geosciences cannot be responsible for site work carried out without being present.



Sno. Co. Gis Aerial Image

TP-1 HB-1 ◆

**Approximate Test Pit & Hand Boring Location** 





Proposed Development 3803 136th Street NE Marysville, Washington SITE MAP FIGURE 1 Cobalt Geosciences, LLC P.O. Box 82243 Kenmore, WA 98028 (206) 331-1097 www.cobaltgeo.com cobaltgeo@gmail.com

Unified Soil Classification System (USCS)									
I	MAJOR DIVISIONS		SYMBOL	TYPICAL DESCRIPTION					
		Clean Gravels	GW	Well-graded gravels, gravels, gravel-sand mixtures, little or no fines					
	Gravels (more than 50% of coarse fraction	(less than 5% fines)	GP GP	Poorly graded gravels, gravel-sand mixtures, little or no fines					
COARSE	retained on No. 4 sieve)	Gravels with Fines	GM	Silty gravels, gravel-sand-silt mixtures					
GRAINED SOILS	,	(more than 12% fines)	GC	Clayey gravels, gravel-sand-clay mixtures					
(more than 50% retained on No. 200 sieve)	Sands	Clean Sands (less than 5%	SW	Well-graded sands, gravelly sands, little or no fines					
110. 200 sieve)	(50% or more of coarse fraction	fines)	SP	Poorly graded sand, gravelly sands, little or no fines					
	passes the No. 4 sieve)	Sands with Fines	SM	Silty sands, sand-silt mixtures					
		(more than 12% fines)	sc	Clayey sands, sand-clay mixtures					
	g'lı l.gl	Inorganic	ML	Inorganic silts of low to medium plasticity, sandy silts, gravelly silts, or clayey silts with slight plasticity					
FINE GRAINED	Silts and Clays (liquid limit less than 50)	morganic	CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays silty clays, lean clays					
SOILS (50% or more	3	Organic	OL	Organic silts and organic silty clays of low plasticity					
passes the No. 200 sieve)	g'lı lol	Inorganic	МН	Inorganic silts, micaceous or diatomaceous fine sands or silty soils, elastic silt					
	Silts and Clays (liquid limit 50 or more)	morganic	CH	Inorganic clays of medium to high plasticity, sandy fat clay, or gravelly fat clay					
	,	Organic	ОН	Organic clays of medium to high plasticity, organic silts					
HIGHLY ORGANIC SOILS	Primarily organic ma and organic odor	atter, dark in color,	<u>₩</u>	Peat, humus, swamp soils with high organic content (ASTM D4427)					

## **Classification of Soil Constituents**

MAJOR constituents compose more than 50 percent, by weight, of the soil. Major constituents are capitalized (i.e., SAND).

Minor constituents compose 12 to 50 percent of the soil and precede the major constituents (i.e., silty SAND). Minor constituents preceded by "slightly" compose 5 to 12 percent of the soil (i.e., slightly silty SAND).


Trace constituents compose o to 5 percent of the soil (i.e., slightly silty SAND, trace gravel).

Relative Density	Consistency			
(Coarse Grained Soils)	(Fine Grained Soils)			
N, SPT, Relative Blows/FT Density  0 - 4 Very loose 4 - 10 Loose 10 - 30 Medium dense 30 - 50 Dense Over 50 Very dense	N, SPT, Relative Blows/FT Consistency Under 2 Very soft 2 - 4 Soft 4 - 8 Medium stiff 8 - 15 Stiff 15 - 30 Very stiff Over 30 Hard			

Grain Size Definitions								
Description	Sieve Number and/or Size							
Fines	<#200 (0.08 mm)							
Sand -Fine -Medium -Coarse	#200 to #40 (0.08 to 0.4 mm) #40 to #10 (0.4 to 2 mm) #10 to #4 (2 to 5 mm)							
Gravel -Fine -Coarse	#4 to 3/4 inch (5 to 19 mm) 3/4 to 3 inches (19 to 76 mm)							
Cobbles	3 to 12 inches (75 to 305 mm)							
Boulders	>12 inches (305 mm)							

	<b>Moisture Content Definitions</b>
Dry	Absence of moisture, dusty, dry to the touch
Moist	Damp but no visible water
Wet	Visible free water, from below water table



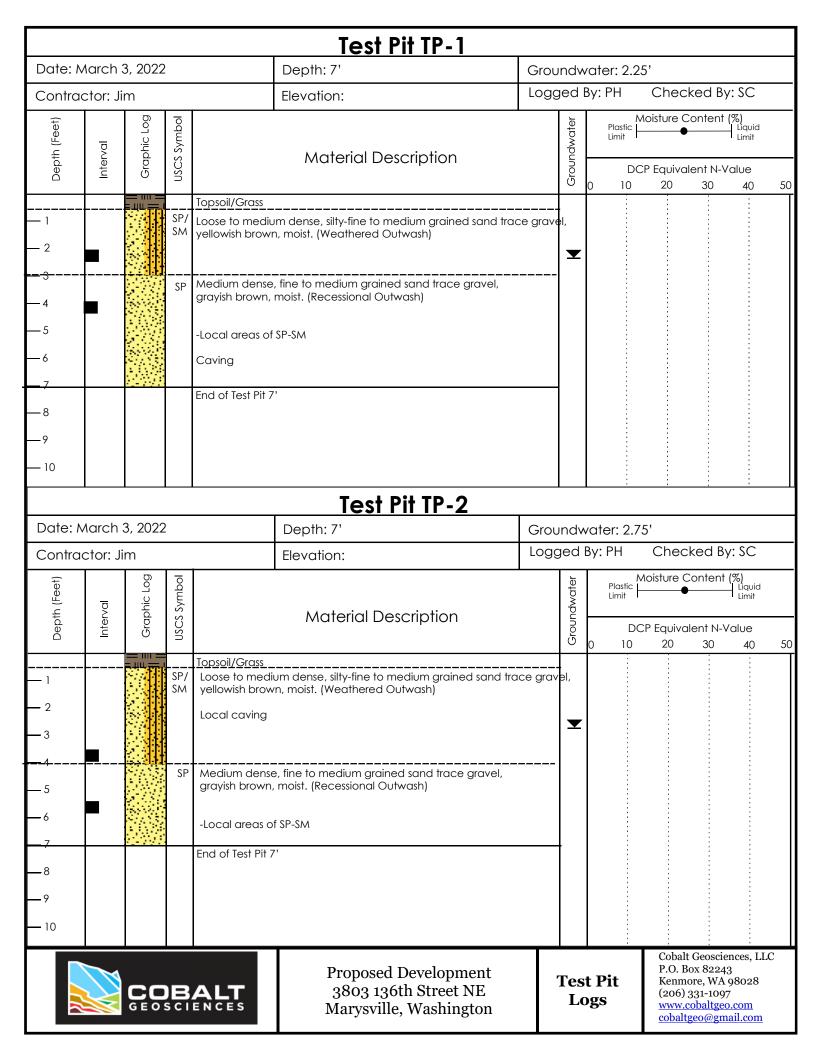

					Hand Boring HB-1							
Date: N	1arch (	3, 2022	)					undwater: 2.75'				
Contrac	ctor: C	obalt			Elevation: Logg			gged By: PH Checked By: SC				
Depth (Feet)	Interval	Graphic Log USCS Symbol			Material Description			Moisture Content (%) Plastic Limit Liquid Limit  DCP Equivalent N-Value			ı	
	_	=     =	$\rightarrow$	Taranail (Crass			Groundwater	0 10	20	30 40	50	
— 1 — 2			SP/ SM	Topsoil/Grass Loose to medit yellowish brow Local caving	um dense, silty-fine to medium grained sand tro n, moist. (Weathered Outwash)	ace grav						
<del></del> 3	<b></b> -		SP	Medium dense grayish brown,	e, fine to medium grained sand trace gravel, moist. (Recessional Outwash)		•					
5				-Local areas of	SP-SM							
<del> 6</del> 7				End of Hand Bo	oring 6'							
— 8 — 9												
<u> </u>		C C	<b>B</b>	<b>ALT</b> ENCES	Proposed Development 3803 136th Street NE Marysville, Washington		Boı	and ring ogs	P.O. Box Kenmore (206) 331 www.cob	WA 98028		

					Hand Boring HB-2								
Date: M	1arch 3	3, 2022			Depth: 6'	Grou	oundwater: 2.75'						
Contrac	ctor: C	obalt			Elevation:	Elevation: Logged					ed By		
Depth (Feet)	Interval	Graphic Log	USCS Symbol		Material Description		Groundwater		DCP E		ent N-Vo	LIMIT	50
			SP/ SM	yellowish brow  Local caving  Medium dense		ace grav	vel, ▼						
		C C G E O S	B	<b>ALT</b> ENCES	Proposed Development 3803 136th Street NE Marysville, Washington		Boı	and ring ogs		P.O. Bo Kenmo (206) 3 www.co	Geoscier x 82243 re, WA 9 31-1097 baltgeo eo@gma	08028 .com	С

Date: M	Narch 3	3, 2022			Hand Boring HB-3  Depth: 6'	Grou	undw	vater: 2.5	.,		
Contrac	ctor: C	obalt			Elevation:	Logo	gged By: PH Checked By: SC				
Depth (Feet)	Interval	Graphic Log	USCS Symbol		Material Description	1	Groundwater	Limit	Moisture Content (S	Limit	
			SP/ SM	yellowish brow  Local caving  Medium dense		ce grav	yel, ▼				
		<b>C</b> O	<b>B</b> ,	<b>ALT</b> ENCES	Proposed Development 3803 136th Street NE Marysville, Washington		Boı	and ring ogs	Cobalt Geoscien P.O. Box 82243 Kenmore, WA 9 (206) 331-1097 www.cobaltgeo.cobaltgeo@gma	8028 com	