

June 23, 2021

Huseby Homes Attn: Darin Huseby darin@husebyhomes.com

RE: Limited Geotechnical Evaluation

Proposed Commercial Development 4131 104th Street NE Marysville, Washington

In accordance with your authorization, Cobalt Geosciences, LLC has prepared this letter to discuss the results of our geotechnical evaluation at the referenced site.

The purpose of our evaluation was to provide recommendations for foundation design, stormwater management, pavements, grading, and earthwork.

Site Description

The site is located at 4131 104th Street NE in Marysville, Washington. The site consists of three irregularly shaped parcels (No.'s 30051600200100, 30051600201500, and 30051600200200) with a total area of about 5.9 acres.

The is mostly undeveloped and heavily vegetated with grasses, bushes, shrubs, blackberry vines, ferns, ivy, and variable diameter trees. Most of the site is nearly level to slightly sloping downward to the west. There are relatively steep slopes extending downward to the west near the west property lines. The slope areas are 20 to 30 feet tall with magnitudes of 30 to 60 percent.

The site is bordered to the west by a low area with ponds and residential properties, to the north by commercial property, to the east by railroad right of way and State Avenue, and to the south by commercial and residential properties. A local roadway extends into the property between the southern two parcels.

The proposed development includes two office/warehouse buildings and two warehouse structures. Associated development will include parking areas, utilities, and stormwater management systems. Foundation loads will be light to moderate and site grading may include cuts of 3 feet or less. Stormwater will be infiltrated if determined to be feasible.

Area Geology

The <u>Geologic Map of The Marysville Quadrangle</u> indicates that the site is underlain by Vashon Recessional Outwash – Marysville Sand Member.

These deposits include normally consolidated sands with areas of gravel and local silt/clay interbeds. These materials are often highly permeable.

Soil & Groundwater Conditions

As part of our evaluation, we excavated seven test pits within the property, where accessible.

All of the explorations encountered approximately 6 inches of grass and topsoil underlain by about 1 to 2.5 feet of loose to medium dense, silty-fine to medium grained sand trace gravel (Weathered Marysville Sand). This layer was underlain by medium dense, fine to medium grained sand trace gravel and silt (Marysville Sand), which continued to the termination depths of the test pits. Local silty-sands were present at some depths.

Groundwater was not encountered in the explorations. Groundwater appears to be ponded at the base of the adjacent ravine. The approximate elevation of groundwater below the site would be 30 feet above sea level, approximately 30 feet below site elevations.

Water table elevations often fluctuate over time. The groundwater level will depend on a variety of factors that may include seasonal precipitation, irrigation, land use, climatic conditions and soil permeability. Water levels at the time of the field investigation may be different from those encountered during the construction phase of the project.

Steep Slope Hazards

There are local steep slope areas near the west property lines of the parcels. The slopes are well vegetated with trees and understory and we did not observe evidence of landslide activity or soil erosion. While these areas consist of steep slope hazards, they do not exhibit evidence or characteristics of landslide hazard areas.

The project can be completed without decreasing slope stability or pose an unreasonable threat to persons or property on the site or adjacent areas provided the earthwork and grading activities are periodically monitored by the geotechnical engineer and performed according to the plans and this report. We recommend a minimum building and infiltration system setback of 20 and 30 feet respectively from the top of the steep slope areas. We should be provided with the final plans to verify that our recommendations are sufficient and do not require updating.

Erosion Hazard

The <u>Natural Resources Conservation Services</u> (NRCS) maps for Snohomish County indicate that the site is underlain by Norma loam and Ragnar fine sandy loam (o to 8 percent slopes). These soils would have a slight to moderate erosion potential in a disturbed state depending on the slope magnitude.

It is our opinion that soil erosion potential at this project site can be reduced through landscaping and surface water runoff control. Typically, erosion of exposed soils will be most noticeable during periods of rainfall and may be controlled by the use of normal temporary erosion control measures, such as silt fences, hay bales, mulching, control ditches and diversion trenches. The typical wet weather season, with regard to site grading, is from October 31st to April 1st. Erosion control measures should be in place before the onset of wet weather.

Seismic Hazard

The overall subsurface profile corresponds to a Site Class D as defined by Table 1613.5.2 of the International Building Code (IBC). A Site Class D applies to an overall profile consisting of stiff/medium dense soils within the upper 100 feet.

We referenced the U.S. Geological Survey (USGS) Earthquake Hazards Program Website to obtain values for S_S , S_I , F_a , and F_v . The USGS website includes the most updated published data on seismic conditions. The following tables provide seismic parameters from the USGS web site with referenced parameters from ASCE 7-10 and 7-16.

Seismic Design Parameters (ASCE 7-10)

Site Class	Spectral Acceleration at 0.2 sec. (g)	Spectral Acceleration at 1.0 sec. (g)	Si Coeffi	te cients	Design Response	Design PGA	
			Fa	F_{v}	$\mathbf{S}_{ ext{DS}}$	S_{D_1}	
D	1.124	0.437	1.05	1.563	0.787	0.455	0.453

Seismic Design Parameters (ASCE 7-16)

Site Class	Spectral Acceleration at 0.2 sec. (g)	Spectral Acceleration at 1.0 sec. (g)	Si Coeffi	te cients	Design Response	Design PGA	
			F_a	F_{v}	$\mathbf{S}_{ ext{DS}}$	S_{D1}	
D	1.097	0.391	1.061	Null	0.776	Null	0.466

Additional seismic considerations include liquefaction potential and amplification of ground motions by soft/loose soil deposits. The liquefaction potential is highest for loose sand with a high groundwater table. The site has a relatively low likelihood of liquefaction. For items listed as "Null" see Section 11.4.8 of the ASCE.

Conclusions and Recommendations

General

The site is underlain by Marysville Sand which becomes medium dense or firmer within about 4 feet of the ground surface. The proposed commercial buildings may be supported on shallow foundation systems bearing on medium dense or firmer native soils or on structural fill placed on the native soils. Local overexcavation or recompaction of loose weathered native soils may be necessary depending on the proposed elevations and locations of the new footings. The geotechnical engineer should verify soil conditions during foundation excavation.

The Marysville Sand is suitable for infiltration of runoff from new impervious surfaces. We recommend that any trenches, vaults, or drywells penetrate at least 6 inches into the medium sands. The medium sand was observed between about 3 and 6 feet below grade. Systems should be set back at least 30 feet from the top of the steep slope areas. We can provide additional recommendations once a civil plan has been prepared.

June 23, 2021 Page 4 of 12 Geotechnical Evaluation

Buildings should be setback at least 20 feet from the top of the steep slope areas. In general, pavements may be located closer to these areas; however, we should review the final plans to confirm suitability and if additional grading recommendations are warranted.

Site Preparation

Trees, shrubs and other vegetation should be removed prior to stripping of surficial organic-rich soil and fill. Based on observations from the site investigation program, it is anticipated that the stripping depth will be 6 to 18 inches. Deeper excavations will be necessary in areas of existing foundation systems and in any areas underlain by undocumented fill.

The native soils consist of silty-sand and poorly graded sand. Most of the native soils may be used as structural fill provided they achieve compaction requirements and are within 3 percent of the optimum moisture. Some of these soils may only be suitable for use as fill during the summer months, as they will be above the optimum moisture levels in their current state. These soils are variably moisture sensitive and may degrade during periods of wet weather and under equipment traffic.

Imported structural fill should consist of a sand and gravel mixture with a maximum grain size of 3 inches and less than 5 percent fines (material passing the U.S. Standard No. 200 Sieve). Structural fill should be placed in maximum lift thicknesses of 12 inches and should be compacted to a minimum of 95 percent of the modified proctor maximum dry density, as determined by the ASTM D 1557 test method.

Temporary Excavations

Based on our understanding of the project, we anticipate that the grading could include local cuts on the order of approximately 3 feet or less for foundation and utility placement. Any deeper temporary excavations should be sloped no steeper than 1.5H:1V (Horizontal:Vertical) in loose native soils and 1H:1V in medium dense native soils. If an excavation is subject to heavy vibration or surcharge loads, we recommend that the excavations be sloped no steeper than 2H:1V, where room permits.

Temporary cuts should be in accordance with the Washington Administrative Code (WAC) Part N, Excavation, Trenching, and Shoring. Temporary slopes should be visually inspected daily by a qualified person during construction activities and the inspections should be documented in daily reports. The contractor is responsible for maintaining the stability of the temporary cut slopes and reducing slope erosion during construction.

Temporary cut slopes should be covered with visqueen to help reduce erosion during wet weather, and the slopes should be closely monitored until the permanent retaining systems or slope configurations are complete. Materials should not be stored or equipment operated within 10 feet of the top of any temporary cut slope.

Soil conditions may not be completely known from the geotechnical investigation. In the case of temporary cuts, the existing soil conditions may not be completely revealed until the excavation work exposes the soil. Typically, as excavation work progresses the maximum inclination of temporary slopes will need to be re-evaluated by the geotechnical engineer so that supplemental recommendations can be made. Soil and groundwater conditions can be highly variable. Scheduling for soil work will need to be adjustable, to deal with unanticipated conditions, so that the project can proceed and required deadlines can be met.

June 23, 2021 Page 5 of 12 Geotechnical Evaluation

If any variations or undesirable conditions are encountered during construction, we should be notified so that supplemental recommendations can be made. If room constraints or groundwater conditions do not permit temporary slopes to be cut to the maximum angles allowed by the WAC, temporary shoring systems may be required. The contractor should be responsible for developing temporary shoring systems, if needed. We recommend that Cobalt Geosciences and the project structural engineer review temporary shoring designs prior to installation, to verify the suitability of the proposed systems.

Foundation Design

The proposed commercial buildings may be supported on shallow spread footing foundation systems bearing on undisturbed dense or firmer native soils or on properly compacted structural fill placed on the suitable native soils. Any undocumented fill and/or loose native soils should be removed and replaced with structural fill below foundation elements. Structural fill below footings should consist of clean angular rock 5/8 to 4 inches in size. We should verify soil conditions during foundation excavation work.

For shallow foundation support, we recommend widths of at least 16 and 24 inches, respectively, for continuous wall and isolated column footings supporting the proposed structure. Provided that the footings are supported as recommended above, a net allowable bearing pressure of 3,000 pounds per square foot (psf) may be used for design.

A 1/3 increase in the above value may be used for short duration loads, such as those imposed by wind and seismic events. Structural fill placed on bearing, native subgrade should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. Footing excavations should be inspected to verify that the foundations will bear on suitable material.

Exterior footings should have a minimum depth of 18 inches below pad subgrade (soil grade) or adjacent exterior grade, whichever is lower. Interior footings should have a minimum depth of 12 inches below pad subgrade (soil grade) or adjacent exterior grade, whichever is lower.

If constructed as recommended, the total foundation settlement is not expected to exceed 1 inch. Differential settlement, along a 25-foot exterior wall footing, or between adjoining column footings, should be less than ½ inch. This translates to an angular distortion of 0.002. Most settlement is expected to occur during construction, as the loads are applied. However, additional post-construction settlement may occur if the foundation soils are flooded or saturated. All footing excavations should be observed by a qualified geotechnical consultant.

Resistance to lateral footing displacement can be determined using an allowable friction factor of 0.40 acting between the base of foundations and the supporting subgrades. Lateral resistance for footings can also be developed using an allowable equivalent fluid passive pressure of 225 pounds per cubic foot (pcf) acting against the appropriate vertical footing faces (neglect the upper 12 inches below grade in exterior areas). The frictional and passive resistance of the soil may be combined without reduction in determining the total lateral resistance.

Care should be taken to prevent wetting or drying of the bearing materials during construction. Any extremely wet or dry materials, or any loose or disturbed materials at the bottom of the footing excavations, should be removed prior to placing concrete. The potential for wetting or drying of the bearing materials can be reduced by pouring concrete as soon as possible after completing the footing excavation and evaluating the bearing surface by the geotechnical engineer or his representative.

Concrete Retaining Walls

The following table, titled **Wall Design Criteria**, presents the recommended soil related design parameters for retaining walls with a level backslope. Contact Cobalt if an alternate retaining wall system is used. This has been included for new cast in place walls, if proposed.

Wall Design Criteria	
"At-rest" Conditions (Lateral Earth Pressure – EFD+)	55 pcf (Equivalent Fluid Density)
"Active" Conditions (Lateral Earth Pressure – EFD+)	35 pcf (Equivalent Fluid Density)
Seismic Increase for "At-rest" Conditions (Lateral Earth Pressure)	18H* (Uniform Distribution) 1 in 2,500 year event
Seismic Increase for "At-rest" Conditions (Lateral Earth Pressure)	12H* (Uniform Distribution) 1 in 500 year event
Seismic Increase for "Active" Conditions (Lateral Earth Pressure)	6H* (Uniform Distribution)
Passive Earth Pressure on Low Side of Wall (Allowable, includes F.S. = 1.5)	Neglect upper 2 feet, then 250 pcf EFD ⁺
Soil-Footing Coefficient of Sliding Friction (Allowable; includes F.S. = 1.5)	0.40

^{*}H is the height of the wall; Increase based on one in 500 year seismic event (10 percent probability of being exceeded in years),

The stated lateral earth pressures do not include the effects of hydrostatic pressure generated by water accumulation behind the retaining walls. Uniform horizontal lateral active and at-rest pressures on the retaining walls from vertical surcharges behind the wall may be calculated using active and at-rest lateral earth pressure coefficients of 0.3 and 0.5, respectively. A soil unit weight of 125 pcf may be used to calculate vertical earth surcharges.

To reduce the potential for the buildup of water pressure against the walls, continuous footing drains (with cleanouts) should be provided at the bases of the walls. The footing drains should consist of a minimum 4-inch diameter perforated pipe, sloped to drain, with perforations placed down and enveloped by a minimum 6 inches of pea gravel in all directions.

The backfill adjacent to and extending a lateral distance behind the walls at least 2 feet should consist of free-draining granular material. All free draining backfill should contain less than 3 percent fines (passing the U.S. Standard No. 200 Sieve) based upon the fraction passing the U.S. Standard No. 4 Sieve with at least 30 percent of the material being retained on the U.S. Standard No. 4 Sieve. The primary purpose of the free-draining material is the reduction of hydrostatic pressure. Some potential for the moisture to contact the back face of the wall may exist, even with treatment, which may require that more extensive waterproofing be specified for walls, which require interior moisture sensitive finishes.

⁺EFD - Equivalent Fluid Density

June 23, 2021 Page 7 of 12 Geotechnical Evaluation

We recommend that the backfill be compacted to at least 90 percent of the maximum dry density based on ASTM Test Method D1557. In place density tests should be performed to verify adequate compaction. Soil compactors place transient surcharges on the backfill. Consequently, only light hand operated equipment is recommended within 3 feet of walls so that excessive stress is not imposed on the walls.

Stormwater Management Feasibility

The site is underlain by Marysville Sand member of Vashon Recessional Outwash. Infiltration is suitable in these soil deposits. Groundwater was not encountered in the explorations. Groundwater appears to be ponded at the base of the adjacent ravine. The approximate elevation of groundwater below the site would be 30 feet above sea level, approximately 30 feet below site elevations.

Because the recessional deposits have not been overridden by glacial ice, this soil unit is considered normally-consolidated. The Washington State Department of Ecology 2019 Stormwater Management Manual for Western Washington allows determination of infiltration rates of this soil unit by Soil Particle Size Distribution testing. This method involves using a logarithmic equation and grain size values along with correction factors for testing type, soil homogeneity, and influent control.

The equation in conjunction with sieve analysis results yields preliminary design infiltration rates of between 3 and 5 inches per hour at depths of 3 to 6 feet below grade. These rates reflect application of correction factors for variability (0.5 used), influent control (0.9), and testing analysis type (0.4). We should be provided with the final civil plans so that we may provide specific infiltration rates at specific system locations and depths.

Infiltration systems should have a depth of at least 2.5 feet below existing grades and located at least 10 feet apart. Any fine grained soils or interbeds of fine grained soils must be removed prior to rock placement. Systems should be setback at least 30 feet from the top of the steep slope areas.

We should be provided with final plans for review to determine if the intent of our recommendations has been incorporated or if additional modifications are needed. Verification testing of infiltration systems should be performed during construction.

Slab-on-Grade

We recommend that the upper 18 inches of the existing fill and/or native soils within slab areas be re-compacted to at least 95 percent of the modified proctor (ASTM D1557 Test Method).

Often, a vapor barrier is considered below concrete slab areas. However, the usage of a vapor barrier could result in curling of the concrete slab at joints. Floor covers sensitive to moisture typically requires the usage of a vapor barrier. A materials or structural engineer should be consulted regarding the detailing of the vapor barrier below concrete slabs. Exterior slabs typically do not utilize vapor barriers.

The American Concrete Institutes ACI 360R-06 Design of Slabs on Grade and ACI 302.1R-04 Guide for Concrete Floor and Slab Construction are recommended references for vapor barrier selection and floor slab detailing.

Slabs on grade may be designed using a coefficient of subgrade reaction of 210 pounds per cubic inch (pci) assuming the slab-on-grade base course is underlain by structural fill placed and compacted as outlined in Section 8.1. A 4- to 6-inch-thick capillary break layer should be placed over the prepared subgrade. This material should consist of pea gravel or 5/8 inch clean angular rock.

A perimeter drainage system is recommended unless interior slab areas are elevated a minimum of 12 inches above adjacent exterior grades. If installed, a perimeter drainage system should consist of a 4-inch diameter perforated drain pipe surrounded by a minimum 6 inches of drain rock wrapped in a non-woven geosynthetic filter fabric to reduce migration of soil particles into the drainage system. The perimeter drainage system should discharge by gravity flow to a suitable stormwater system.

Exterior grades surrounding buildings should be sloped at a minimum of one percent to facilitate surface water flow away from the building and preferably with a relatively impermeable surface cover immediately adjacent to the building.

Erosion and Sediment Control

Erosion and sediment control (ESC) is used to reduce the transportation of eroded sediment to wetlands, streams, lakes, drainage systems, and adjacent properties. Erosion and sediment control measures should be implemented, and these measures should be in general accordance with local regulations. At a minimum, the following basic recommendations should be incorporated into the design of the erosion and sediment control features for the site:

- Schedule the soil, foundation, utility, and other work requiring excavation or the disturbance of the site soils, to take place during the dry season (generally May through September). However, provided precautions are taken using Best Management Practices (BMP's), grading activities can be completed during the wet season (generally October through April).
- All site work should be completed and stabilized as quickly as possible.
- Additional perimeter erosion and sediment control features may be required to reduce the
 possibility of sediment entering the surface water. This may include additional silt fences, silt
 fences with a higher Apparent Opening Size (AOS), construction of a berm, or other filtration
 systems.
- Any runoff generated by dewatering discharge should be treated through construction of a sediment trap if there is sufficient space. If space is limited other filtration methods will need to be incorporated.

Groundwater Influence on Construction

We do not anticipate that significant volumes of groundwater will be encountered in shallow excavations during the dry season.

If groundwater is encountered, we anticipate that sump excavations and small diameter pumps systems will adequately de-water short-term excavations, if required. Any system should be designed by the contractor. We can provide additional recommendations upon request.

June 23, 2021 Page 9 of 12 Geotechnical Evaluation

Utilities

Utility trenches should be excavated according to accepted engineering practices following OSHA (Occupational Safety and Health Administration) standards, by a contractor experienced in such work. The contractor is responsible for the safety of open trenches. Traffic and vibration adjacent to trench walls should be reduced; cyclic wetting and drying of excavation side slopes should be avoided. Depending upon the location and depth of some utility trenches, groundwater flow into open excavations could be experienced, especially during or shortly following periods of precipitation.

In general, sandy soils were encountered at shallow depths in the explorations at this site. These soils have low cohesion and density and will have a tendency to cave or slough in excavations. Shoring or sloping back trench sidewalls is required within these soils in excavations greater than 4 feet deep.

All utility trench backfill should consist of imported structural fill or suitable on site soils. Utility trench backfill placed in or adjacent to buildings and exterior slabs should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. The upper 5 feet of utility trench backfill placed in pavement areas should be compacted to at least 95 percent of the maximum dry density based on ASTM Test Method D1557. Below 5 feet, utility trench backfill in pavement areas should be compacted to at least 90 percent of the maximum dry density based on ASTM Test Method D1557. Pipe bedding should be in accordance with the pipe manufacturer's recommendations.

The contractor is responsible for removing all water-sensitive soils from the trenches regardless of the backfill location and compaction requirements. Depending on the depth and location of the proposed utilities, we anticipate the need to re-compact existing fill soils below the utility structures and pipes. The contractor should use appropriate equipment and methods to avoid damage to the utilities and/or structures during fill placement and compaction procedures.

Pavements

The near surface subgrade soils generally consist of silty sand and poorly graded sand. These soils are rated as good for pavement subgrade material (depending on silt content and moisture conditions). We estimate that the subgrade will have a California Bearing Ratio (CBR) value of 10 and a modulus of subgrade reaction value of k = 200 pci, provided the subgrade is prepared in general accordance with our recommendations.

We recommend that at a minimum, 18 inches of the existing subgrade material be moisture conditioned (as necessary) and re-compacted to prepare for the construction of pavement sections. Deeper levels of recompaction or overexcavation and replacement may be necessary in areas where fill and/or very poor (soft/loose) soils are present.

The subgrade should be compacted to at least 95 percent of the maximum dry density as determined by ASTM Test Method D1557. In place density tests should be performed to verify proper moisture content and adequate compaction.

The recommended flexible and rigid pavement sections are based on design CBR and modulus of subgrade reaction (k) values that are achieved, only following proper subgrade preparation. It should be noted that subgrade soils that have relatively high silt contents will likely be highly sensitive to moisture conditions. The subgrade strength and performance characteristics of a silty subgrade material may be dramatically reduced if this material becomes wet.

Based on our knowledge of the proposed project, we expect the traffic to range from light duty (passenger automobiles) to heavy duty (delivery trucks). The following tables show the recommended pavement sections for light duty and heavy duty use.

ASPHALTIC CONCRETE (FLEXIBLE) PAVEMENT

LIGHT DUTY

Asphaltic Concrete	Aggregate Base*	Compacted Subgrade* **			
2.5 in.	6.0 in.	18.0 in.			

HEAVY DUTY

Asphaltic Concrete	Aggregate Base*	Compacted Subgrade* **			
3.5 in.	6.0 in.	18.0 in.			

PORTLAND CEMENT CONCRETE (RIGID) PAVEMENT

Min. PCC Depth	Aggregate Base*	Compacted Subgrade* **			
6.0 in.	6.0 in.	18.0 in.			

^{* 95%} compaction based on ASTM Test Method D1557

The asphaltic concrete depth in the flexible pavement tables should be a surface course type asphalt, such as Washington Department of Transportation (WSDOT) ½ inch HMA. The rigid pavement design is based on a Portland Cement Concrete (PCC) mix that has a 28 day compressive strength of 4,000 pounds per square inch (psi). The design is also based on a concrete flexural strength or modulus of rupture of 550 psi.

CONSTRUCTION FIELD REVIEWS

Cobalt Geosciences should be retained to provide part time field review during construction in order to verify that the soil conditions encountered are consistent with our design assumptions and that the intent of our recommendations is being met. This will require field and engineering review to:

- Monitor and test structural fill placement and soil compaction
- Observe bearing capacity at foundation locations
- Observe slab-on-grade preparation
- Verify infiltration system soil conditions
- Observe proofrolls of pavement areas
- Monitor foundation drainage placement
- Observe excavation stability

Geotechnical design services should also be anticipated during the subsequent final design phase to support the structural design and address specific issues arising during this phase. Field and

^{**} A proof roll may be performed in lieu of in place density tests

June 23, 2021 Page 11 of 12 Geotechnical Evaluation

engineering review services will also be required during the construction phase in order to provide a Final Letter for the project.

CLOSURE

This report was prepared for the exclusive use of Huseby Homes and their appointed consultants. Any use of this report or the material contained herein by third parties, or for other than the intended purpose, should first be approved in writing by Cobalt Geosciences, LLC.

The recommendations contained in this report are based on assumed continuity of soils with those of our test holes and assumed structural loads. Cobalt Geosciences should be provided with final architectural and civil drawings when they become available in order that we may review our design recommendations and advise of any revisions, if necessary.

Use of this report is subject to the Statement of General Conditions provided in Appendix A. It is the responsibility of Huseby Homes who is identified as "the Client" within the Statement of General Conditions, and its agents to review the conditions and to notify Cobalt Geosciences should any of these not be satisfied.

Sincerely,

Cobalt Geosciences, LLC



6/23/2021 Phil Haberman, PE, LG, LEG Principal

June 23, 2021 Page 12 of 12 Geotechnical Evaluation

Statement of General Conditions

USE OF THIS REPORT: This report has been prepared for the sole benefit of the Client or its agent and may not be used by any third party without the express written consent of Cobalt Geosciences and the Client. Any use which a third party makes of this report is the responsibility of such third party.

BASIS OF THE REPORT: The information, opinions, and/or recommendations made in this report are in accordance with Cobalt Geosciences present understanding of the site specific project as described by the Client. The applicability of these is restricted to the site conditions encountered at the time of the investigation or study. If the proposed site specific project differs or is modified from what is described in this report or if the site conditions are altered, this report is no longer valid unless Cobalt Geosciences is requested by the Client to review and revise the report to reflect the differing or modified project specifics and/or the altered site conditions.

STANDARD OF CARE: Preparation of this report, and all associated work, was carried out in accordance with the normally accepted standard of care in the state of execution for the specific professional service provided to the Client. No other warranty is made.

INTERPRETATION OF SITE CONDITIONS: Soil, rock, or other material descriptions, and statements regarding their condition, made in this report are based on site conditions encountered by Cobalt Geosciences at the time of the work and at the specific testing and/or sampling locations. Classifications and statements of condition have been made in accordance with normally accepted practices which are judgmental in nature; no specific description should be considered exact, but rather reflective of the anticipated material behavior. Extrapolation of in situ conditions can only be made to some limited extent beyond the sampling or test points. The extent depends on variability of the soil, rock and groundwater conditions as influenced by geological processes, construction activity, and site use.

VARYING OR UNEXPECTED CONDITIONS: Should any site or subsurface conditions be encountered that are different from those described in this report or encountered at the test locations, Cobalt Geosciences must be notified immediately to assess if the varying or unexpected conditions are substantial and if reassessments of the report conclusions or recommendations are required. Cobalt Geosciences will not be responsible to any party for damages incurred as a result of failing to notify Cobalt Geosciences that differing site or sub-surface conditions are present upon becoming aware of such conditions.

PLANNING, DESIGN, OR CONSTRUCTION: Development or design plans and specifications should be reviewed by Cobalt Geosciences, sufficiently ahead of initiating the next project stage (property acquisition, tender, construction, etc), to confirm that this report completely addresses the elaborated project specifics and that the contents of this report have been properly interpreted. Specialty quality assurance services (field observations and testing) during construction are a necessary part of the evaluation of sub-subsurface conditions and site preparation works. Site work relating to the recommendations included in this report should only be carried out in the presence of a qualified geotechnical engineer; Cobalt Geosciences cannot be responsible for site work carried out without being present.



TP-1



Approximate Test Pit Location





Proposed Comm. Development 4131 104th Street NE Marysville, Washington AERIAL PHOTO FIGURE 1 Cobalt Geosciences, LLC P.O. Box 82243 Kenmore, WA 98028 (206) 331-1097 www.cobaltgeo.com cobaltgeo@gmail.com

Unified Soil Classification System (USCS)								
I	MAJOR DIVISIONS		SYMBOL	TYPICAL DESCRIPTION				
		Clean Gravels	GW	Well-graded gravels, gravels, gravel-sand mixtures, little or no fines				
	Gravels (more than 50% of coarse fraction	(less than 5% fines)	GP GP	Poorly graded gravels, gravel-sand mixtures, little or no fines				
COARSE	retained on No. 4 sieve)	Gravels with Fines	GM	Silty gravels, gravel-sand-silt mixtures				
GRAINED SOILS	,	(more than 12% fines)	GC	Clayey gravels, gravel-sand-clay mixtures				
(more than 50% retained on No. 200 sieve)	Sands	Clean Sands (less than 5%	SW	Well-graded sands, gravelly sands, little or no fines				
110. 200 sieve)	(50% or more of coarse fraction	fines)	SP	Poorly graded sand, gravelly sands, little or no fines				
	passes the No. 4 sieve)	Sands with Fines	SM	Silty sands, sand-silt mixtures				
		(more than 12% fines)	sc	Clayey sands, sand-clay mixtures				
	g'lı l.gl	Inorganic	ML	Inorganic silts of low to medium plasticity, sandy silts, gravelly silts, or clayey silts with slight plasticity				
FINE GRAINED	Silts and Clays (liquid limit less than 50)	morganic	CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays silty clays, lean clays				
SOILS (50% or more		Organic	OL	Organic silts and organic silty clays of low plasticity				
passes the No. 200 sieve)	Gilta and Glassa	Inorganic	MH	Inorganic silts, micaceous or diatomaceous fine sands or silty soils, elastic silt				
	Silts and Clays (liquid limit 50 or more)	morganic	CH	Inorganic clays of medium to high plasticity, sandy fat clay, or gravelly fat clay				
	• • •	Organic	ОН	Organic clays of medium to high plasticity, organic silts				
HIGHLY ORGANIC SOILS	Primarily organic ma and organic odor	atter, dark in color,	<u>₩</u> № PT	Peat, humus, swamp soils with high organic content (ASTM D4427)				

Classification of Soil Constituents

MAJOR constituents compose more than 50 percent, by weight, of the soil. Major constituents are capitalized (i.e., SAND).

Minor constituents compose 12 to 50 percent of the soil and precede the major constituents (i.e., silty SAND). Minor constituents preceded by "slightly" compose 5 to 12 percent of the soil (i.e., slightly silty SAND).


Trace constituents compose o to 5 percent of the soil (i.e., slightly silty SAND, trace gravel).

Relative Density	Consistency			
(Coarse Grained Soils)	(Fine Grained Soils)			
N, SPT, Relative Blows/FT Density 0 - 4 Very loose 4 - 10 Loose 10 - 30 Medium dense 30 - 50 Dense Over 50 Very dense	N, SPT, Relative Blows/FT Consistency Under 2 Very soft 2 - 4 Soft 4 - 8 Medium stiff 8 - 15 Stiff 15 - 30 Very stiff Over 30 Hard			

Grain Size Definitions								
Description	Sieve Number and/or Size							
Fines	<#200 (0.08 mm)							
Sand -Fine -Medium -Coarse	#200 to #40 (0.08 to 0.4 mm) #40 to #10 (0.4 to 2 mm) #10 to #4 (2 to 5 mm)							
Gravel -Fine -Coarse	#4 to 3/4 inch (5 to 19 mm) 3/4 to 3 inches (19 to 76 mm)							
Cobbles	3 to 12 inches (75 to 305 mm)							
Boulders	>12 inches (305 mm)							

Moisture Content Definitions							
Dry	Absence of moisture, dusty, dry to the touch						
Moist	Damp but no visible water						
Wet	Visible free water, from below water table						



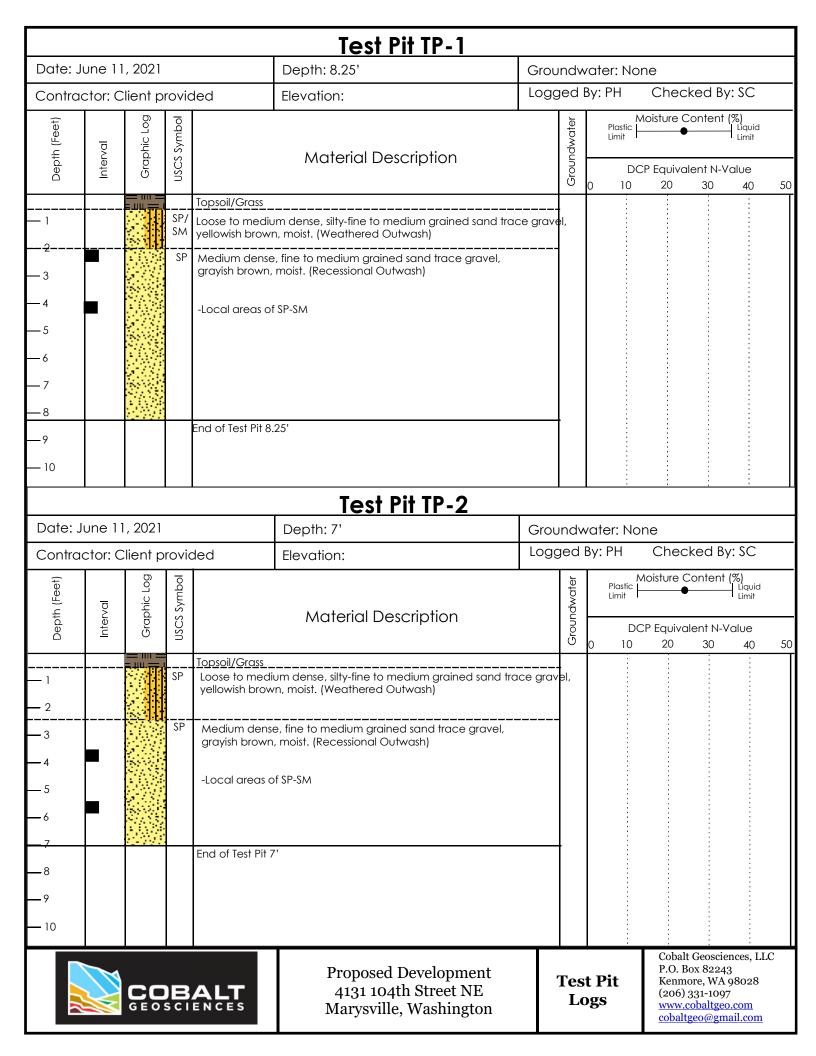

					Test Pit TP-3								
Date: Ju	ıne 11	, 2021			Depth: 8.25'			oundwater: None					
Contrac	tor: C	lient p	rovid	ded	Elevation:	Lo	ogge	ed I	By: PH		ked B	•	
Depth (Feet)	Interval	Graphic Log	USCS Symbol		Material Description					P Equiva	llent N-\	/alue	
				Topsoil/Grass				Groundwater	0 10	20	30	40	50
— 1 — 2			SP/ SM	Loose to mediu	um dense, silty-fine to medium grained sand t n, moist. (Weathered Outwash)	trace g	gravel,	,					
—3 —4 —5	•		SP		e, fine to medium grained sand trace gravel, moist. (Recessional Outwash)								
—6 —7 —8													
—9 — 10				End of Test Pit 8.	.25'								
										<u> </u>	:	<u> </u>	
					Test Pit TP-4								
Date: Ju								oundwater: None gged By: PH Checked By: SC					
Contrac	ctor: C			ded I	Elevation: Logi			Maisture Content (9			-		
Depth (Feet)	Interval	Graphic Log	USCS Symbol		Material Description			Groundwater	Limit Limit	P Equivo		Liquid Limit	50
			SP/ SM SP	yellowish brow Medium dense	um dense, silty-fine to medium grained sand (n, moist. (Weathered Outwash) e, fine to medium grained sand trace gravel, , moist. (Recessional Outwash)							40	
		GE 0)B	ALT ENCES	Proposed Development 4131 104th Street NE Marysville, Washington		Т		t Pit ogs	P.O. E Kenm (206) www.	ox 8224 ore, WA 331-109 cobaltge	3 98028 7	

					Test Pit TP-5							
Date: Ju	ıne 11	, 2021			Depth: 7'			Groundwater: None				
Contrac	tor: C	lient p	rovic	ded	Elevation:	Log	ged	By: PH	Checked	-		
Depth (Feet)	Interval	Graphic Log	USCS Symbol		Material Description		Groundwater	Limit	P Equivalent N	Limit	50	
— 1 — 2 — 3 — 4 — 5 — 6 — 7			SP/ SM SP	yellowish brown Medium dense grayish brown,	om dense, silty-fine to medium grained sand trace, moist. (Weathered Outwash) , fine to medium grained sand trace gravel, moist. (Recessional Outwash)	ce grav						
—8 —9 —10				End of Test Pit 7								
Date: Ju	ıno 11	2021			Test Pit TP-6			a.k a.w. N.l a.v.				
Contrac			rovic	Hod	· ·			undwater: None ged By: PH Checked By: SC				
Depth (Feet)	Interval	Graphic Log	USCS Symbol	aeu .	Material Description		Groundwater	Plastic Limit	Noisture Conte	nt (%) Liquid Limit	50	
— 1 — 2 — 3 — 4 — 5 — 6 — 7 — 8 — 9 — 10			SP/ SM SP	yellowish brow Medium dense	um dense, silty-fine to medium grained sand tro n, moist. (Weathered Outwash) e, fine to medium grained sand trace gravel, moist. (Recessional Outwash)	ace gra						
		GEO:	B	ALT ences	Proposed Development 4131 104th Street NE Marysville, Washington			t Pit ogs	Cobalt Geos P.O. Box 82: Kenmore, W (206) 331-10 www.cobaltg cobaltgeo@g	243 'A 98028 097 geo.com	.C	

				Test Pit TP-7							\dashv
Date: June 11, 2021				Depth: 6'	oundv	oundwater: None					
Contractor: Client provided				Elevation:			By: PH Checked By: SC				
Depth (Feet)	Interval Graphic Log	USCS Symbol		Material Description		Groundwater	Moisture Content (%) Plastic Limit Liquid Limit DCP Equivalent N-Value 0 10 20 30 40 50				
SM yellowish brow				um dense, silty-fine to medium grained sand trace gran, moist. (Weathered Outwash) , fine to medium grained sand trace gravel, moist. (Recessional Outwash)							
-8 -9 -10	C C	B	ALT ENCES	Proposed Development 4131 104th Street NE Marysville, Washington			st Pit ogs	P.O. Kenn (206) www	lt Geosci Box 8224 10re, WA) 331-109 .cobaltge tgeo@gn	.98028 7 o.com	С